

# Covariance Matrix Evaluation and Processing in the Resolved/Unresolved Resonance Regions

T. Kawano, *Los Alamos National Laboratory*

L. Leal, N.M. Larson, *Oak Ridge National Laboratory*

M. Ishikawa, G. Chiba, K. Shibata, *Japan Atomic Energy Agency*

## SUMMARY

This document serves as a summary of the work of Subgroup 20 (SG20) on covariance matrix evaluation and processing in the resolved / unresolved resonance regions, organized under the Nuclear Energy Agency's Nuclear Science Committee Working Party on International Evaluation Co-operation (WPEC).

The work described in this report focuses on: (1) summarizing the issues related to covariance evaluation in the resonance region; (2) discussing the retroactive method used in the SAMMY code [1]; (3) describing the compact format for storing huge covariance matrices in ENDF-6 files; and (4) recent developments and upgrades of processing codes to generate a multigroup covariance matrix from resonance parameter covariance data.

## Participants / Contributors

T. Kawano (chair)	JENDL	Kyushu Univ., LANL
R. Jacqmin (monitor)	JEFF	CEA
L.C. Leal	ENDF	ORNL
N.M. Larson	ENDF	ORNL
R.E. MacFarlane	ENDF	LANL
R.E. Talou	ENDF	LANL
D.G. Naberejnev	ENDF	ANL
M. Ishikawa	JENDL	JNC, JAEA
G. Chiba	JENDL	JNC, JAEA
K. Shibata	JENDL	JAERI, JAEA
S. Tagesen	JEFF	IRK
A. Courcelle	JEFF	CEA

# I Introduction

Requirements for covariance data for advanced technologies of nuclear energy applications are steadily growing. The evaluation of covariance data is, however, difficult and normally requires more effort than the cross section evaluation itself. To provide the covariance data for nuclear data users is to give a qualitative assessment of the data library. Major customers of the covariance data are the reactor core calculations (estimation of uncertainty in the  $k_{\text{eff}}$ , criticality safety study, adjustment of nuclear data libraries [2, 3]), and radiation shielding designs.

In WPEC/Subgroup 2 (SG2) [4], methods to evaluate the covariance of  $^{56}\text{Fe}$  were investigated. After the completion of SG2, extensive progress was made by the JENDL group, and the JENDL-3.2 covariance file [5] for some important nuclides for fast-reactor applications was released. In practice this covariance file would be used for a few limited purposes. However, a long-standing problem remains, concerning the resonance region. For the JENDL-3.2 covariance file in the resonance region, a simple method was adopted to estimate the covariance matrices of the  $^{235,238}\text{U}$  and  $^{239}\text{Pu}$  resolved-resonance parameters [6]. The technique was not applicable to the  $^{235}\text{U}$  resonance parameters in JENDL-3.3, because there are more than 3000 resonances in one energy region.

Since many nuclear data libraries — ENDF, JENDL, and JEFF, for example — adopted the same  $^{235}\text{U}$  resonance parameters obtained by Leal, Derrien, Larson, and Wright [7], the issue to be resolved is of general interest among the nuclear data communities in the world.

Our main objective is to evaluate and report the resonance-parameter covariance matrix in such a way that processing codes can make use of it. Both the method and some of the tools for the evaluation are described in this report. To demonstrate our achievements, we first apply our method to the Gd resonance parameters as a simple example and then extend the technique into the actinide region.

## II Summary of Issues Discussed in the Subgroup

### 1 Covariance for Resonance Parameters

An alternative to providing resonance parameter covariance matrices (RPCM) would be to evaluate uncertainties in multigroup-averaged cross sections [8]. In this method, nuclear data users would find the covariance data in MF=33 of ENDF-6 files, not in MF=32. Although this may be practical for estimating the uncertainties in the resonance region for one energy group structure, the RPCM method is preferable for the following reasons:

- Use of the RPCM method makes it possible to calculate uncertainties for a self-shielding factor.

- The cross section covariance matrix (CSCM) depends on the energy group structure used. It is easy to construct a covariance of grouped cross sections in any kind of structure if the RPCM is available.
- Correlations between different reaction channels, such as fission and capture, can be generated using the RPCM.

Nevertheless, the CSCM method may be used for those cases where high-quality covariance data are not required. One example is resonance parameters for fission products with weak absorption, because few people use this kind of covariance data at present. For such cases, the simple solution is to estimate uncertainties in the averaged capture or total cross sections in the resonance region, and give them in MF=33.

## 2 Data Size Problem

In the current ENDF-6 format, the RPCM is stored in MF=32, for which the number of elements is  $N_r N_p (N_r N_p + 1)/2$ , where  $N_r$  is the number of resonances and  $N_p$  is the number of parameters per resonance. If there are 100 resonances with three parameters ( $E$ ,  $\Gamma_n$ ,  $\Gamma_\gamma$ ), which might be a common case for many fission-product and structural materials, there are 45,150 elements (=7,525 lines), and the file size is about 600 kB. It is still possible to store everything in a single file.

However, when the number of resonances is large, this format is not practical. In the case of  $^{235}\text{U}$ , there are more than 3000 resonances, and each resonance has five parameters. The covariance file for the resonance parameters may exceed one Giga-Byte.

The compact format proposed by Larson [9] permits storage of the full covariance matrix within a reasonable file size by dropping some information that is not so important. This new format is essential to store the huge covariance of resonance parameters of actinides. The proposal was approved by CSEWG (Cross Section Evaluation Working Group) in 2004, and now it is a part of the official ENDF-6 format.

## 3 The Retroactive Technique

For new resonance analyses, uncertainty information is obtained as a bi-product of the fitting procedure used to determine the resonance parameters. Resonance analysis codes such as SAMMY [1] first generate the RPCM and then write it into an appropriate format, i.e., either the original ENDF-6 or the new compact format. The resonance parameter set and the RPCM data are then included in a single ENDF file.

However, it is not always possible or practical to perform completely new evaluations. Instead, RPCM must be found for resonance parameters in the existing nuclear data libraries. To generate these RPCM, it is necessary to collect information regarding how

the resonance analysis was carried out in the past, and mimic the analysis procedure to obtain uncertainty information for the parameters.

The retroactive technique is essentially a simulation of old resonance analyses. Reliability of the RPCM obtained with the retroactive method depends on the accuracy with which the information used for the resonance analysis can be reconstructed. This information includes experimental data, resolution functions of experiments, and other systematic error sources in the data.

In the retroactive technique, experimental data are recreated from the given resonance parameters. Uncertainties in these simulated data are estimated from experimental conditions, etc., and should be realistic. The RPCM is then found by propagating all these errors from the simulated data to the resonance parameters, i.e. by using the R-matrix code to fit the simulated data by varying the resonance parameters. If the resulting fitted parameter values are very nearly the same as the original resonance parameter values, then the associated RPCM is expected to be a good approximation to the RPCM for the original resonance parameters.

## 4 Processing Problem

The current release of the NJOY [10] nuclear-data processing system can process neither the Reich-Moore [11] resonance parameter covariance matrix nor the compact format. However, the ERRORJ code [12, 13] can process both of them. This code can be used as a module of NJOY to generate the covariance matrix for multigroup cross sections. We have encouraged the development of ERRORJ throughout the sub-group activity.

The ERRORJ code [12] was initially written by Kosako and Yamano of Sumitomo Atomic Energy Industries to process the JENDL-3.2 covariance file [5], then the code was then taken over by Chiba and Ishikawa [5] of Japan Nuclear Cycle Development Institute, JNC (present affiliation, Japan Atomic Energy Agency, JAEA). They have developed the code in order to make it usable with the other libraries, and implemented new features. The code has been distributed to many institutes, including JAEA, Toshiba, ORNL, ANL, LANL, NEA Databank, IAEA, and IPPE.

Recently ORNL has established a new capability for processing covariance data. The PUFF code [14, 15] can now process resonance parameter covariance matrices in both the original and the new compact format.

Although SAMMY is not a processing code, it also has the capability of generating the multigroup averaged cross sections and the associated covariance matrix in the resonance region. SAMMY has therefore been used to check the multigroup cross section covariances generated by ERRORJ and PUFF.

# III Procedure to Evaluate Resonance Parameter Covariances

## 1 Retroactive Method

The retroactive method is a simulation of the resonance analysis. Instead of performing a full resonance analysis, it is simulated with reconstructed fictitious experimental data. Figure 1 shows a usual procedure of resonance analysis. Point-wise cross sections are once generated from initial parameters taking account of the experimental resolution function, Doppler broadening and self-shielding effects and so forth, and the calculated cross sections are compared with the experimental data. With a Bayesian update technique, a set of resonance parameters and the associated covariance matrix are obtained, which give a good fit to the experimental data within the accuracy of the data.

The retroactive method (Fig. 2) starts with the existing resonance parameters. We assume that resonance parameters in the nuclear data libraries are the best estimates based on the experimental data available for the data analysis. Point-wise cross section data (or transmission data) are reconstructed from the resonance parameters with the appropriate resolution function and the target temperature. A typical resolution function can be found at several time-of-flight (TOF) facilities, such as ORELA (ORNL) and GELINA (IRMM).

The generated data are used as the simulated experimental data, and the parameter fitting to the data is performed. The uncertainties in the simulated data are also simulated, using typical statistical and systematic errors found in the literature. The parameter fitting gives  $\chi^2$  very close to zero and there is essentially no change in the parameters, because the generated experimental and calculated cross sections are identical.

Larson has implemented the retroactive covariance generation option into the SAMMY code, and we recommend that this capability be used for covariance evaluations. The JENDL-3.2 resonance covariance data [6] adopted a similar but simplified method. Table 1 shows a comparison of methods used in JENDL-3.2 and those used in SAMMY.

### (1) Example 1, Simple Case

The covariance matrix of resonance parameters obtained in this manner reproduces the accuracy of the simulated data, so that the generated data uncertainties should be realistic. As a simple example, we ignore all the data broadening and distortion effects, and just calculate cross sections with the given resonance parameters. Figure 3 shows the change in the capture cross sections of  $^{156}\text{Gd}$  when the capture width  $\Gamma_\gamma$  of the 33-eV resonance was increased by 50%. This results in 30% increase in the calculated capture cross section at 10 eV, and a relative sensitivity of  $30/50 = 0.6$ . If we assume that the uncertainty in the capture cross section at 10 eV is 5%,  $\Gamma_\gamma$  should have an uncertainty of  $5/0.6 = 8.3\%$ .

Table 1: Comparison of JENDL-3.2/3.3 and SAMMY retroactive methods.

	JENDL	SAMMY Retroactive
Data point	averaged over several resonances	Reconstructed (simulated) from original resonance parameters
Resolution	N/A	taken from typical experiments
Uncertainties	inferred from real experiments, but rounded into a single value — 5% for example	estimated from real experiments, can be rounded into a single value
Correction	N/A	Doppler and resolution broadening, multiple scattering, normalization, and background, etc.
Sensitivity	sensitivity to the $\bar{\sigma}$	at each data point

We generate the “simulated experimental data” by using the  $^{156}\text{Gd}$  resonance parameters in ENDF/B-VI, which were evaluated using the Multi-Level Breit-Wigner formula. First, we consider the capture data only. Important quantities are the number of data points included (relevant to the TOF data energy interval), and the energy resolution. Here we consider simple Gaussian broadening due to the experimental energy resolution. In the measurement of  $^{99}\text{Tc}$  capture cross section [15] at the KURRI TOF facility, there are about 100 energy points in the TOF data. Sources of uncertainty in the neutron capture measurement are statistical errors (3–10%), normalization errors (6%), and other corrections (about 2%). We assumed that the simulated neutron capture data are in a similar quality of the KURRI  $^{99}\text{Tc}$  data, so that 10 uncertainties in the capture cross sections with 50% correlation that comes from normalization are given to the simulated data. The correlation coefficients tend to be large because of the uncertainties in the data normalization. The energy resolution (FWHM) of 1% was also taken from the real experiment.

It should be stressed that the data uncertainties are not copied from the KURRI experiments. Rather, the uncertainty information is estimated by referring to a typical experimental set-up, assuming that accuracies of measurements at each experimental facility are not very different.

The KALMAN code [17] was used to estimate the RPCM. The CSCM was reconstructed from the RPCM and the sensitivity matrices; calculated uncertainties in the capture cross section are shown in Fig. 4. The average uncertainty in the capture cross sections in the energy range 0–300 eV is 5.8%. The total cross section has larger uncertainties, because transmission data were not included in this evaluation.

The neutron transmission data for Gd isotopes were analyzed by Mughabghab and Chrien [18]. Since no experimental transmission data are available in EXFOR, we simulated the data and included realistic estimates of experimental conditions. The simu-

lated data are based on the following assumptions: transmission data energy interval of  $\delta E \sim 0.01E_n$  (obtained from the literature), energy resolution of 1%, 10% total uncertainties with 50% correlation. We did not include the data in the off-resonance region, because they are not informative. The calculated uncertainties in the total cross sections are shown in Fig. 5. The average uncertainty is 2%. Since capture data were not used in this calculation, the uncertainties in the capture cross section became unrealistic.

The combined result, which includes simulated total and capture data, is shown in Fig. 6. The average uncertainty in the total cross section is 1.7%, and in capture is 3.2%.

## (2) Example 2, Using the SAMMY Retroactive Option

Experimental data in the resonance region, as discussed before, often reveal a strong correlation due to the data normalization. If the data are strongly correlated, statistical errors are not so important because they disappear when many data points are included, and only systematic (normalization) error remains. In this situation the retroactive analysis of the resonance covariance with SAMMY becomes fairly efficient.

An important quantity in the SAMMY retroactive method is the normalization error. Here we again employ the Gd isotope as an example. We assumed that the capture normalization error is 5%, and the total normalization error is 3%. Those values were chosen so as: (1) to reproduce the evaluated uncertainties in the thermal cross sections reported by Mughabghab [19], and (2) to be reasonably consistent with realistic situations of measurements.

Figure 7 shows generated neutron capture cross sections for  $^{155}\text{Gd}$  with SAMMY. The data were made for 12,370 energy points in the energy range 0–183.3 eV, which covers the entire resolved-resonance region. The total cross section data were also generated on the same energy grid. The statistical uncertainty in the capture reaction was assumed to be 20%, and in the total was 2%. Those values do not have a large impact on the final result. Note that those uncertainties are just statistical, and they are not correlated.

SAMMY generates the RPCM by fitting the resonance parameters to the simulated experimental data. The resonance parameters do not change during the fitting process, because the calculated and experimental cross sections are the same. The RPCM is then written into the ENDF-6 format (standard ENDF-6 or compact format); this RPCM is shown in the standard format in Fig. 8.

## 2 Compact Format

The compact covariance matrix format proposed by Larson reduces drastically the file size of resonance parameter covariance. The format was approved by CSEWG, and the ENDF-6 data format manual (Rev.2005) [9] explains this format in detail. In this format, the covariance of resonance parameters is decomposed into the correlation matrix and

uncertainties. The correlation coefficients, which range from  $-1.0$  to  $1.0$ , are scaled by factor of 100, and expressed by signed integer numbers, from  $-99$  to  $99$ .

The following procedure to compact the correlation coefficients is defined in the ENDF-6 manual [9]:

1. Drop (set to zero) all values of correlation between  $-0.02$  and  $+0.02$ .
2. Multiply the remaining coefficients by 100.
3. Map all positive values greater than  $K$  and less than or equal to  $K + 1$  to the integer  $K$ .
4. Map all negative values less than  $-K$  and greater than or equal to  $-K - 1$  to the integer  $-K$ .

As an example, the resonance parameter covariance for  $^{157}\text{Gd}$  in the compact format is shown in Fig. 9.

The compact covariance matrix format has a great advantage in storing the resonance parameter covariances of actinides. For many of major actinides such as  $^{233,235}\text{U}$ , only the compact format can hold the complete covariance data in the nuclear data library. Leal et al. [20] performed the R-matrix resonance analysis of  $^{233}\text{U}$ , and the full covariance matrix of 769 resonance parameters were obtained with SAMMY. When the data are stored using ENDF-6 format, the file size becomes 94 MB; with the compact format, the size is a mere 2 MB.

### 3 Processing

The ERRORR module of NJOY [10] is able to process the RPCM if that is given by the Multi-Level Breit Wigner (MLBW) formula. However, a long-standing problem regarding the processing code involves processing the covariances of the ENDF LRF=3 format (the so-called Reich-Moore format) [11].

The problem was resolved by the JENDL project. The ERRORJ code [12], which was an improved version of ERRORR, was developed to process the JENDL-3.2 covariance file [5]. The code has subsequently been improved extensively by Chiba and Ishikawa [13], and the current status of the ERRORJ code was reported by Chiba [21] at the workshop of “Perspectives on Nuclear Data for the Next Decade,” CEA/BRC, Sept. 26–28, 2005.

To generate covariance matrix of multigroup cross sections, the processing code calculates error propagation from the resonance parameter covariance to the cross section, for which it needs the sensitivity coefficients  $\partial\sigma_i/\partial p_j$ , where  $\sigma_i$  is the  $i$ -th group cross section, and  $p_j$  is the resonance parameter. ERRORJ calculates the sensitivity coefficients numerically. These numerical derivatives have been tested by comparing with SAMMY’s analytic calculations of  $\partial\sigma_i/\partial p_j$ .

Recently Wiarda made improvements in the PUFF code [15] at ORNL. PUFF now has a capability of processing of LRF=3 resonance parameter covariance matrix, using the same analytical derivatives as SAMMY.

## 4 Unresolved Resonance Region

Issues to be discussed regarding the unresolved resonance region mainly concern the format, comprising two parts: (1) uncertainty on the nuclear radius, and (2) energy-dependent unresolved resonance parameters.

The current ENDF-6 format does not include provision for an uncertainty on the nuclear radius. Due to this limitation, the calculated uncertainties in the averaged cross sections in the unresolved resonance region tend to be small, as discussed by Kawano and Shibata [22]. However, the nuclear radius is usually held fixed while performing a resonance analysis, and the uncertainty in the radius parameter should be reflected (absorbed) by the uncertainties in the resonance parameters themselves.

The covariance of unresolved resonance parameters must be in one energy region, even if energy-dependent unresolved resonance parameters are given in MF=2. This problem would be resolved by applying the retroactive evaluation technique to the unresolved resonance parameters. The energy-independent unresolved resonance parameters are fitted to the simulated cross sections generated from the energy-dependent parameters.

Those two issues require modifications to the current ENDF-6 format. However, the motivation for the new format proposal is not so strong, since the current format is still able to accommodate the covariance data in the unresolved region as described above.

## IV Results and Discussions

Resonance parameter covariance matrices for the Gd isotopes for ENDF/B-VII were evaluated by Leal [23]. Those were compiled into the ENDF-6 format files, and tested by processing with ERRORJ.

The relative uncertainties in the total and elastic cross sections are shown in Fig. 10. The uncertainties in the capture cross section are very similar to the total cross section, and omitted from this plot. Figure 11 shows the correlation matrix of  $^{155}\text{Gd}$  multigroup total cross section in the resonance region (up to 100 eV), generated with ERRORJ. Regions that have negative correlation coefficient are shown by the solid-line boxes. If the covariance in the resonance region is evaluated based on the averaged cross section data, the correlation matrix may have positive elements only, because of systematic (normalization) errors in the experimental data used. Negative correlations occur because of the introduction of the physics of resonances into the data analysis.

The first three resonances of  $^{155}\text{Gd}$  are at 0.0268 eV, 2.008 eV, and 2.568 eV, which

are shown by arrows in Fig. 12. Below the first resonance the cross section has a simple  $1/v$  shape, so that those cross sections should be almost fully correlated. The resonance analysis tells us that the cross sections between the first and second resonances must be anti-correlated to the  $1/v$  region.

The correlation matrices for the elastic scattering and capture cross sections are shown in Figs. 13 and 14. Those are similar to the total cross section in Fig. 11. The cross-correlation between different reaction channels can be given by the RPCM. Figure 15 shows the correlation matrix between the elastic and capture channels generated by ERRORJ. Such cross-correlation is especially important at thermal energy. For fissile materials like  $^{235}\text{U}$  and  $^{239}\text{Pu}$ , we expect a strong correlation between the fission and the total cross sections at thermal energy, because the fraction of fission in the total absorption is very large. For the fertile and non-fissioning materials, the total and capture cross sections may be strongly correlated. By using the RPCM, such a physical property is automatically taken into account.

Leal et al. [24] presented a method to generate covariance data for  $^{233}\text{U}$  resonance parameters using SAMMY. The  $^{233}\text{U}$  covariance data were processed with ERRORJ to produce COVERX formatted data, and benchmark calculations were done with TSUNAMI. It was shown that contribution of  $^{233}\text{U}$  resonance parameter uncertainties to  $k_{\text{eff}}$  is about 0.5% for the  $^{233}\text{U}$  thermal system (u233-sol-therm-015).

## V Concluding Remarks

We have discussed several important issues existing in the covariance evaluation in the resolved and unresolved resonance regions, including data processing. For existing resonance parameters, we showed that the retroactive technique is a powerful method for generating resonance parameter covariance matrices (RPCM). The retroactive method has been implemented in the SAMMY code, and examples were shown for the covariance data of Gd isotopes.

Resonance parameter covariance matrices tend to be large; it was shown that the compact format drastically reduces the file size. This new format was approved by CSEWG in 2004, and it is now a part of the official ENDF-6 format. The compact format enables storage of the full RPCM in the evaluated nuclear data library within a reasonable file size.

To process the Reich-Moore resonance parameter covariance to make multigroup cross section covariance data, two processing codes are available — ERRORJ and PUFF. These two codes are also able to read the compact format. We presented the multigroup cross section covariance of  $^{155}\text{Gd}$ .

## References

- [1] N.M. Larson, “Updated Users’ Guide for SAMMY: Multilevel R-Matrix Fits to Neutron Data Using Bayese’ Equation,” ORNL/TM-9179/R6, Oak Ridge National Laboratory (2003).
- [2] M. Ishikawa, “Development of a unified cross-section set ADJ2000 based on adjustment technique for fast reactor analysis,” *J. Nucl. Sci. Technol.*, **Suppl.2**, 1073 (2002).
- [3] M. Ishikawa, “Recent Application of Nuclear Data to Fast Reactor Core Analysis and Design in Japan,” *Proc. Int. Conf. Nuclear Data for Science and Technology*, Sep.26–Oct.1, 2004, Santa Fe, New Mexico, USA, p.1405 (2005).
- [4] WPEC/Subgroup 2 (Co-ordinator H. Vonach), “Generation of Covariance Files for Iron-56 and Natural Iron,” Nuclear Energy Agency, OECD (1996).
- [5] K. Shibata, A. Hasegawa, O. Iwamoto, S. Chiba, M. Sugimoto, N. Odano, T. Kawano, Y. Nakajima, T. Murata, H. Matsunobu, S.Y. Oh, K. Yokoyama, K. Sugino, M. Ishikawa, K. Kosako, N. Yamano, Y. Kanda, “JENDL-3.2 Covariance File,” *J. Nucl. Sci. Technol.*, **Suppl.2**, 40 (2002).
- [6] T. Kawano, K. Shibata, *J. Nucl. Sci. Technol.*, **39**, 807 (2002).
- [7] L.C. Leal, H. Derrien, N.M. Larson, R.Q. Wright, “R-Matrix Analysis of  $^{235}\text{U}$  Neutron Transmission and Cross Sections in the Energy Range 0 to 2.25 keV,” ORNL/TM-13516, Oak Ridge National Laboratory (1997); *Nucl. Sci. Eng.*, **131**, 230 (1999).
- [8] K. Shibata, *J. Nucl. Sci. Technol.*, **42**, 130 (2005).
- [9] N.M. Larson, “Compact Covariance Matrix,” in *ENDF-102 Data Formats and Procedures for the Evaluated Nuclear Data File ENDF-6*, BNL-NCS-4494505-Rev., Cross Section Evaluation Working Group, Brookhaven National Laboratory, NY, USA, (2005).
- [10] R.E. MacFarlane, D.W. Muir, “The NJOY Nuclear Data Processing System Version 91,” LA-12740-M (1994); “The NJOY Nuclear Data Processing System Version 99” (1999).
- [11] C.W. Reich, M.S. Moore, *Phys. Rev.*, **111**, 929 (1968).
- [12] K. Kosako, “Covariance Data Processing Code: ERRORJ,” *Proc. of the Specialists’ Meeting on Reactor Group Constants*, Feb. 22–23, 2001, JAERI, Tokai, Japan,

- edited by J. Katakura, JEARI-Conf 2001-009, p.30, Japan Atomic Energy Research Institute (2001) ; K. Kosako, N. Yamano, "Preparation of a Covariance Processing System for the Evaluated Nuclear Data File, JENDL, (III)," JNC TJ9440 99-003, Japan Nuclear Cycle Development Institute (1999) [in Japanese].
- [13] G. Chiba, M. Ishikawa, "Revision and Application of the Covariance Data Processing Code, ERRORJ," *Proc. Int. Conf. Nuclear Data for Science and Technology*, Sept. 26–Oct.1, 2004, Santa Fe, New Mexico, USA, p.468 (2005).
- [14] M.E. Dunn, "PUFF-III: A Code for Processing ENDF Uncertainty Data Into Multi-group Covariance Matrices," Oak Ridge National Laboratory, NUREG/CR-6650 ORNL/TM-1999/235, (2000).
- [15] D. Wiarda, M.E. Dunn, N.M. Greene, N.M. Larson, L.C. Leal, "New Capabilities for Processing Covariance Data in the Resonance Region," *PHYSOR 2006* [to be published].
- [16] K. Kobayashi, Samyol Lee, S. Yamamoto, T. Kawano, *Nucl. Sci. Eng.*, **146**, 209 (2004).
- [17] T. Kawano, K. Shibata, "Covariance Evaluation System," JAERI-Data/Code 97-037, Japan Atomic Energy Research Institute (1997) [in Japanese].
- [18] S.F. Mughabghab, R.E. Chrien, *Phys. Rev.*, **180**, 1131 (1969).
- [19] S.F. Mughabghab, "Atlas of Neutron Resonances," to be published by Academic Press, 2006.
- [20] L.C. Leal, H. Derrien, J.A. Harvey, K.H. Guber, N.M. Larson, R.R. Spencer, "R-Matrix resonance analysis and statistical properties of the resonance parameters of  $^{233}\text{U}$  in the neutron energy range from thermal to 600 eV," ORNL/TM-2000/372, Oak Ridge National Laboratory (2001).
- [21] G. Chiba, "Resonance self shielding in covariance processing," *Proc. workshop of Perspectives on Nuclear Data for the Next Decade*, Sept. 26–28, 2005, CEA/BRC, France [to be published].
- [22] "Evaluation of Covariance Matrices for Resolved and Unresolved Resonance Regions," T. Kawano, K. Shibata, *Proc. of the 11th Int. Symp. on Reactor Dosimetry*, Brussels, Belgium, Aug. 18–23, 2002, Eds. J. Wagemans, H.A. Abderrahim, P.D'hondt, C.De Raedt, World Scientifics, p.631 (2003).
- [23] L. Leal (2006) [private communication].

- [24] L. Leal, G. Arbanas, N. Larson, H. Derrien, D. Wiarda, “Nuclear Data Covariance Generation in the Resonance Region,” Talk at CSEWG & USNDP Meeting, Nov. 8–11, 2005, Brookhaven National Laboratory, USA (2005).

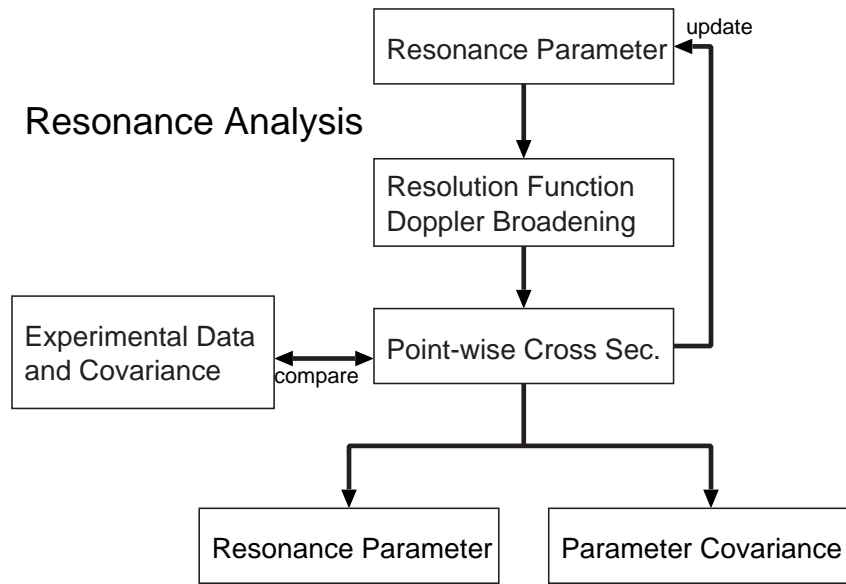


Fig. 1: Procedure to obtain resonance parameters.

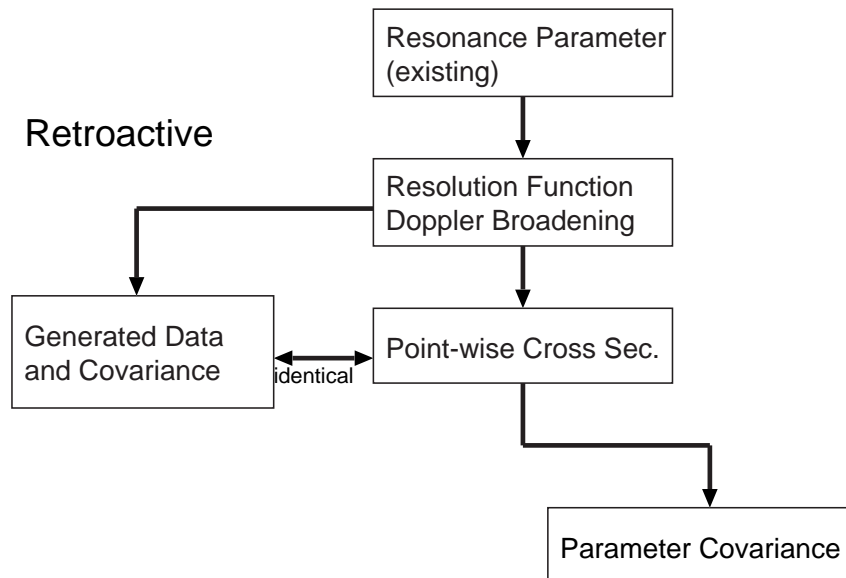


Fig. 2: Retroactive method.

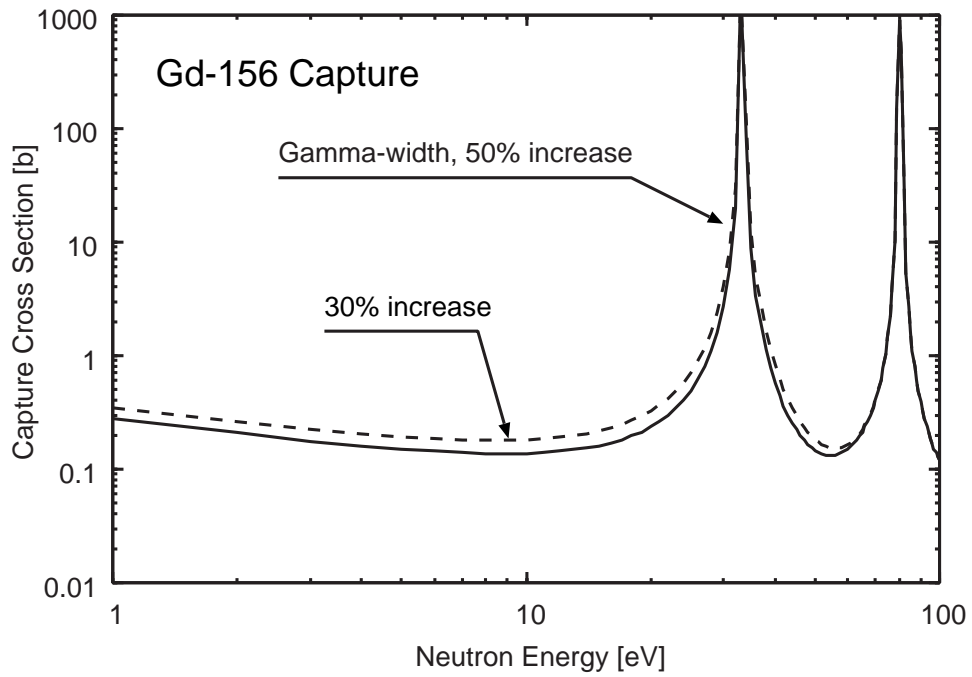


Fig. 3: Sensitivity of the capture width of the first resonance to the capture cross sections for  $^{156}\text{Gd}$ .

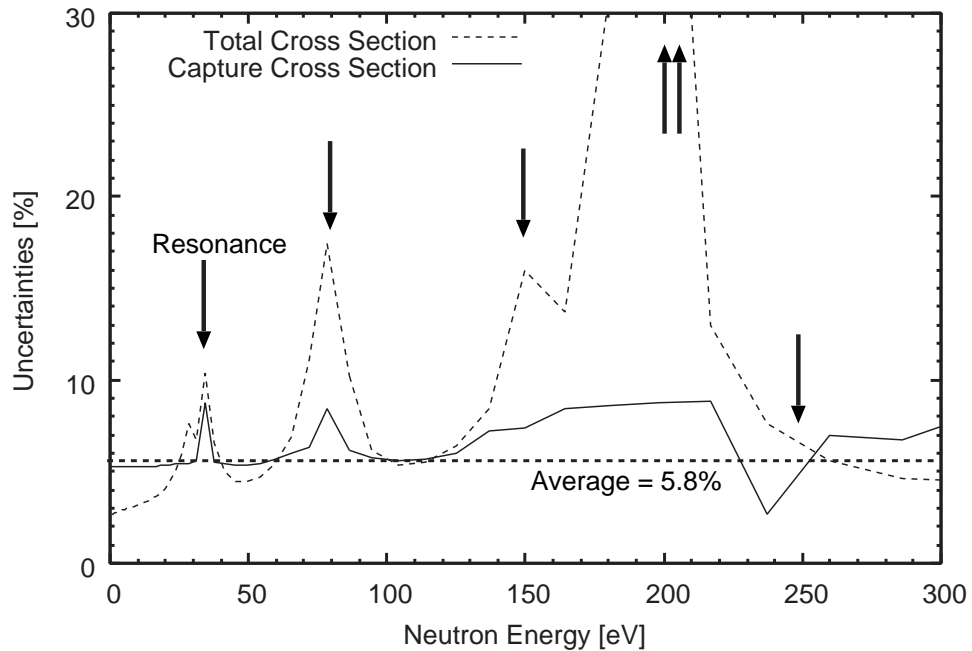


Fig. 4: Calculated uncertainties in the  $^{156}\text{Gd}$  capture cross sections, assuming the simulated capture data have 10% uncertainties with 50% correlation. The arrows show the location of resonances.

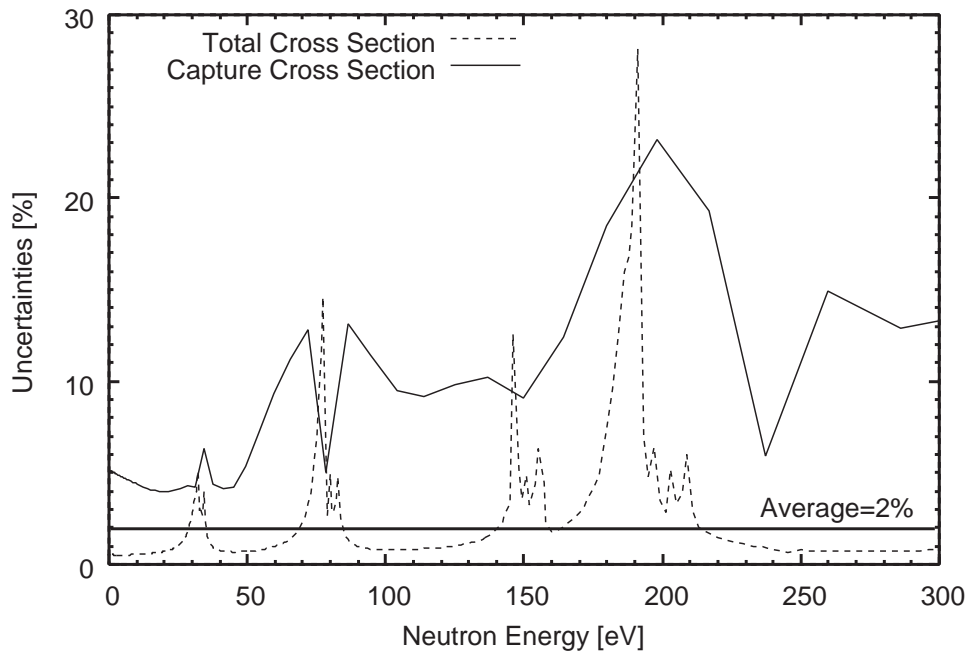


Fig. 5: Calculated uncertainties in the  $^{156}\text{Gd}$  total cross sections, assuming the simulated total cross section data have 10% uncertainties with 50% correlation.

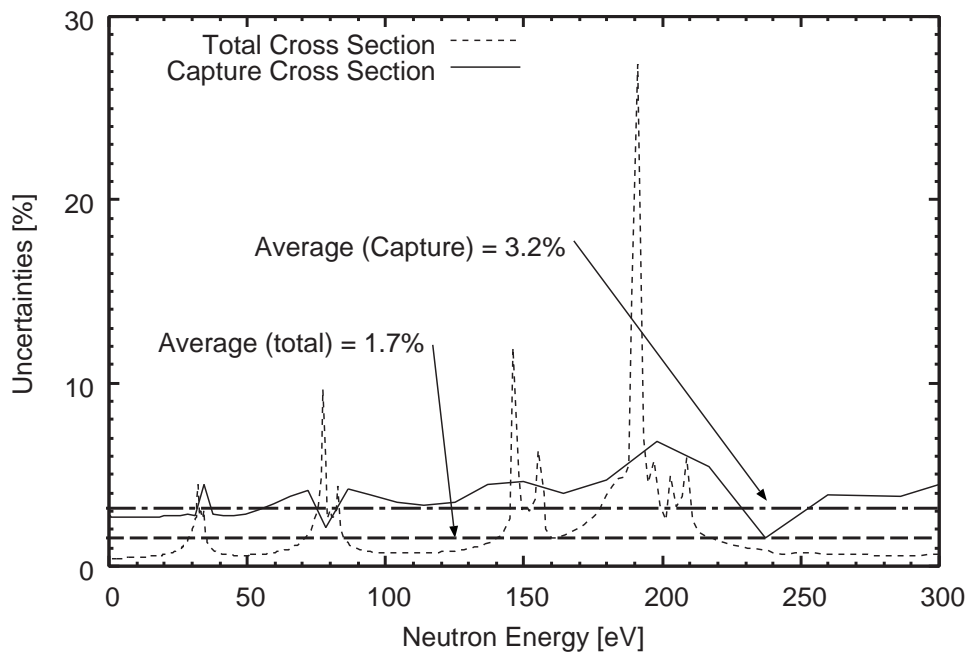


Fig. 6: Calculated uncertainties in the  $^{156}\text{Gd}$  capture and total cross sections.

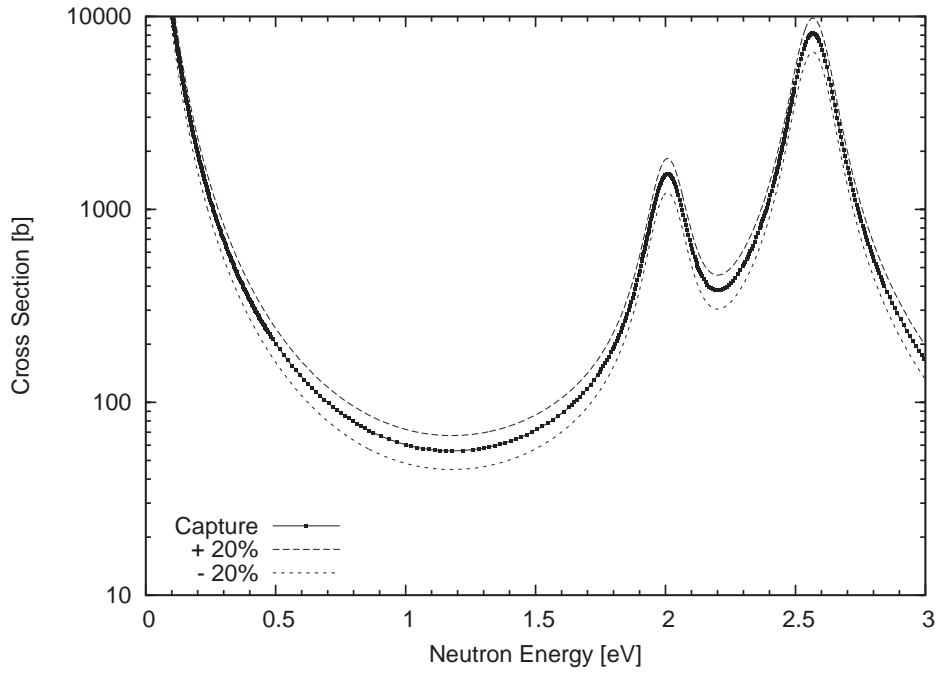


Fig. 7: Generated  $^{155}\text{Gd}$  capture cross sections using SAMMY. The dotted and dashed curves are the  $\pm 20\%$  uncertainty band.

64155.0	1.535920+2	0	0	1	0643432151	1
64155.0	1.000000+0	0	0	1	0643432151	2
1.000000-5	1.833000+2	1	3	0	1643432151	3
1.5	7.900000-1	0	1	0	0643432151	4
1.535920+2		0	0	1	0643432151	5
		3	0	38778	92643432151	6
0.026799999	2.0	1.040000-4	1.080000-1		643432151	7
2.007999999	1.0	3.706666-4	1.100000-1		643432151	8
2.568000000	2.0	1.744000-3	1.110000-1		643432151	9
3.616000000	1.0	4.400000-5	1.300000-1		643432151	10
.....						
175.5999999	2.0	2.080000-3	1.098000-1		643432151	96
178.0000000	1.0	9.733333-3	1.098000-1		643432151	97
180.3999999	1.0	1.466667-2	1.098000-1		643432151	98
1.875531-7	.3376958-9	-2.264001-7	.7678523-9	.0042410-9	2.186969-8	9643432151 99
.0196131-9	-.0722565-9	1.476097-8	1.785823-9	-.0036186-9	-5.272415-9	9643432151 100
-.0217329-9	-.0853346-9	1.741534-9	-.0046285-9	-.0457875-9	.4604478-9	9643432151 101
.0003844-9	-.0071501-9	-.8064558-9	.0359892-9	-.0248011-9	-.5288035-9	9643432151 102
-.0759183-9	-.0364101-9	-.4262018-9	-.0668140-9	-.1325805-9	-.5289678-9	9643432151 103
.....						
8.837309-9	1.220777-8	-7.495823-7	1.732927-8	-1.512111-7	-2.818956-9	9643432151 6467
3.366244-9	-2.203100-8	3.179969-5	3.093391-7	8.139690-8	-4.179741-9	6643432151 6468
6.019313-6	-3.344716-8	6.208129-7	3.055970-8	-2.288672-7	1.823992-9	5643432151 6469

Fig. 8: ENDF-6 formatted  $^{155}\text{Gd}$  resonance parameter covariance generated by SAMMY.

6.415700+4	1.555760+2		0	0	1	0644032151	1			
6.415700+4	1.000000+0		0	0	2	0644032151	2			
1.000000-5	3.066000+2		1	3	0	1644032151	3			
1.5	8.000000-1		1	2	1	4644032151	4			
6.415700+4			3	0	720	60644032151	5			
0.030874750	2.0	4.633883-4	1.072601-1			644032151	6			
0.004709259		4.046326-5	1.809663-3			644032151	7			
2.825350651	2.0	3.445999-4	9.710919-2			644032151	8			
0.070088626		8.111083-6	1.940976-3			644032151	9			
16.24198188	1.0	3.992890-4	9.102763-2			644032151	10			
.....										
300.9014716	1.0	5.518277-2	1.016247-1			644032151	122			
0.007512823		8.754985-4	1.692468-3			644032151	123			
306.4155768	2.0	2.815115-3	1.000446-1			644032151	124			
0.013196548		5.442585-5	1.975326-3			644032151	125			
0.0	0.0	0	180	314		314644032151	126			
2	1	99				644032151	127			
3	1	-99	0			644032151	128			
5	4	52				644032151	129			
8	7	11				644032151	130			
9	7	2				644032151	131			
10	7	-1	4	1		644032151	132			
11	1	-1	-1	-1	1	-2	-9			
12	3	-3			5	-2	-1	-64		
13	12	1								
14	1	-1	-1	-1			1	4	1	-2
15	3	-2			-1		-3	-9	-5	-72
16	13	2	1	2						
17	11	3	1	-2	-1	-12	-15			
18	13	-2	-3	-11	-12	1				
19	15	1			1					
20	11	3		3	-3	2	-1	-1		
.....										

Fig. 9: The ENDF-6 resonance parameter covariance of  $^{157}\text{Gd}$  in the compact format.

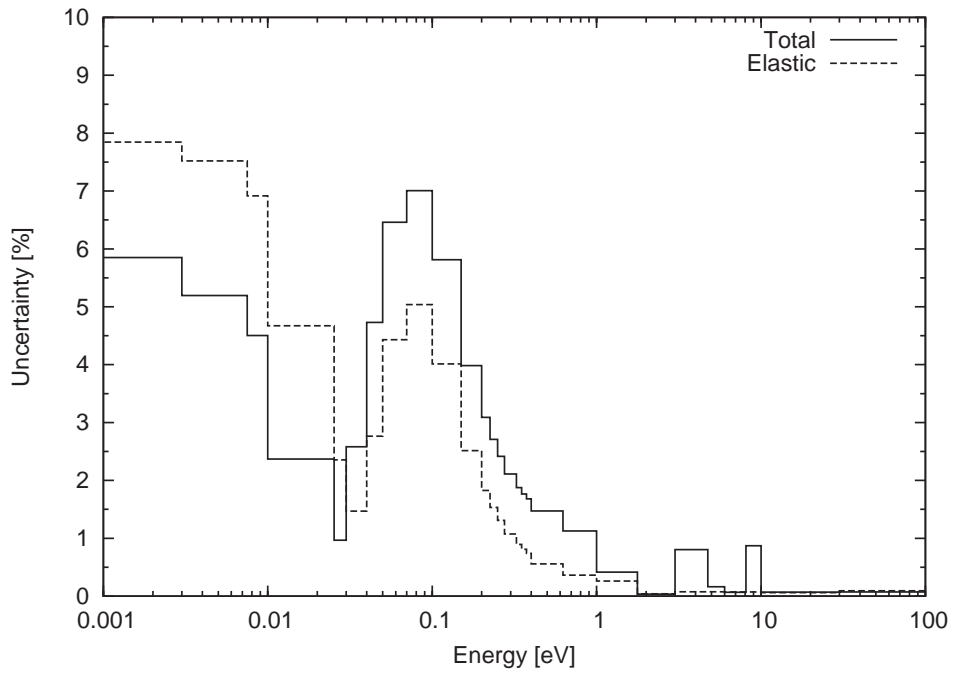


Fig. 10: Uncertainties in the multi-grouped cross sections of  $^{155}\text{Gd}$  generated by ERRORJ. The solid line is for the total and dashed line is for the elastic scattering cross sections.

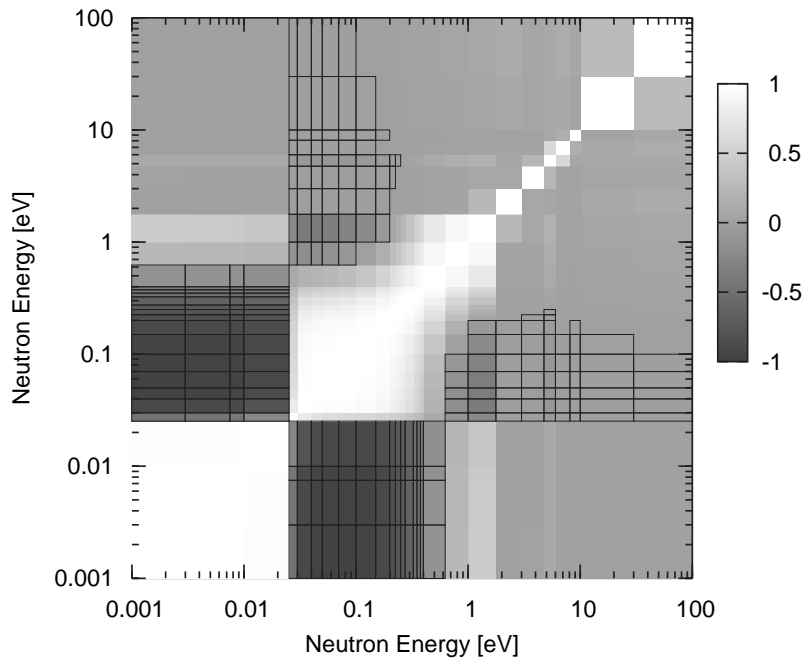


Fig. 11: Correlation matrix of  $^{155}\text{Gd}$  total cross sections in the resonance region, generated by ERRORJ. The regions surrounded by the solid-line boxes have negative correlations.

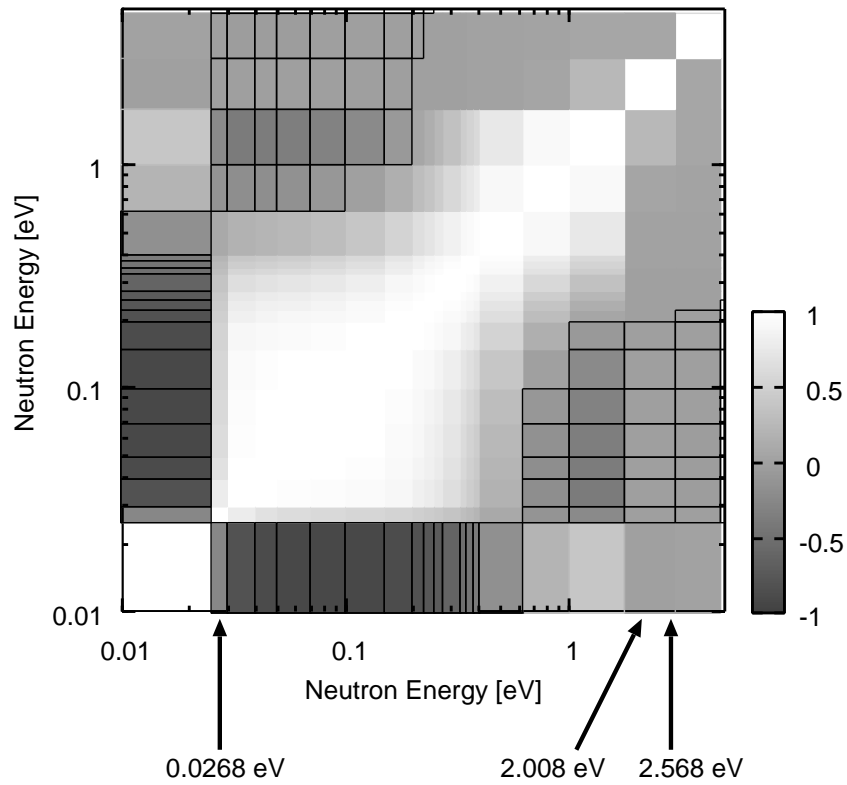


Fig. 12: Zoomed plot of Fig. 11, in the energy range, 0.01–5 eV. Locations of three resonances of  $^{155}\text{Gd}$  are shown by the arrows.

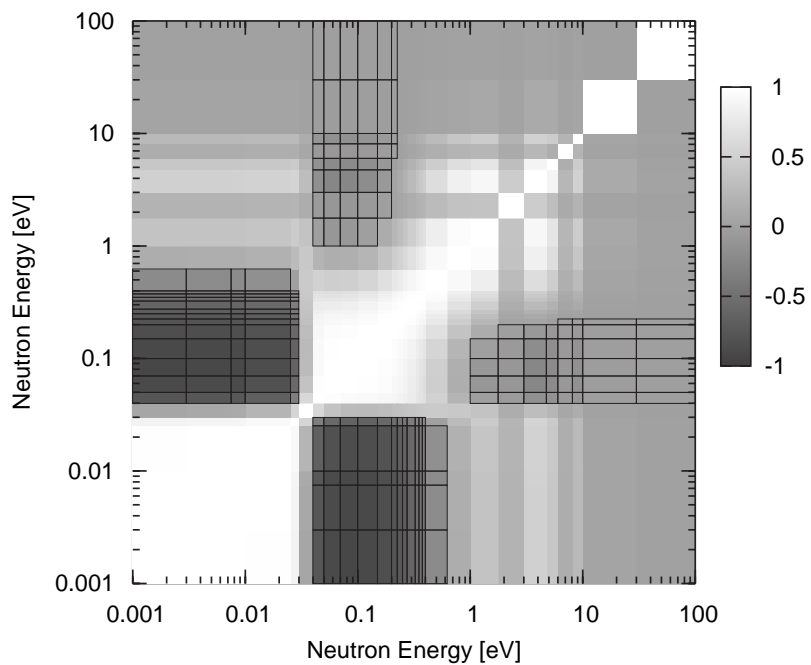


Fig. 13: Correlation matrix of  $^{155}\text{Gd}$  elastic scattering cross sections in the resonance region. The regions surrounded by the solid-line boxes have negative correlations.

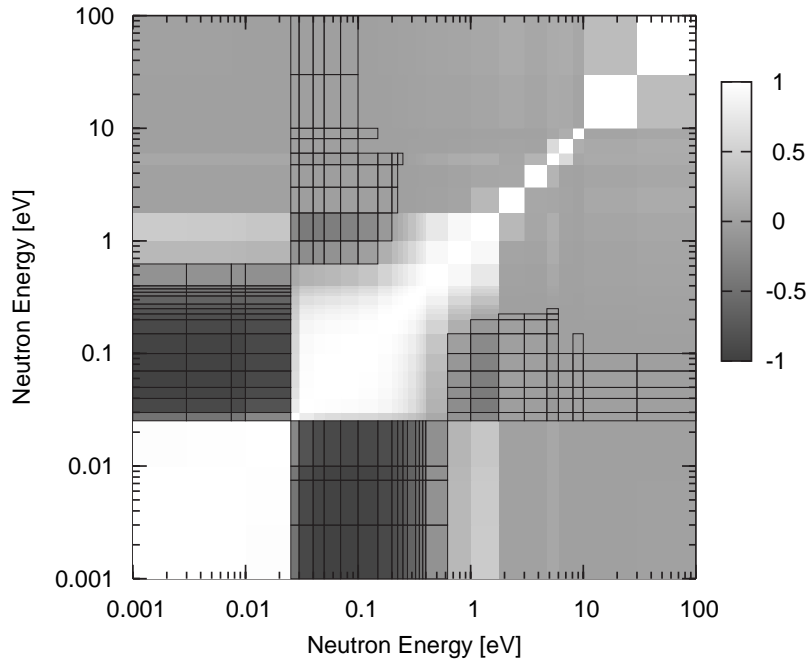


Fig. 14: Correlation matrix of  $^{155}\text{Gd}$  capture cross sections in the resonance region. The regions surrounded by the solid-line boxes have negative correlations.

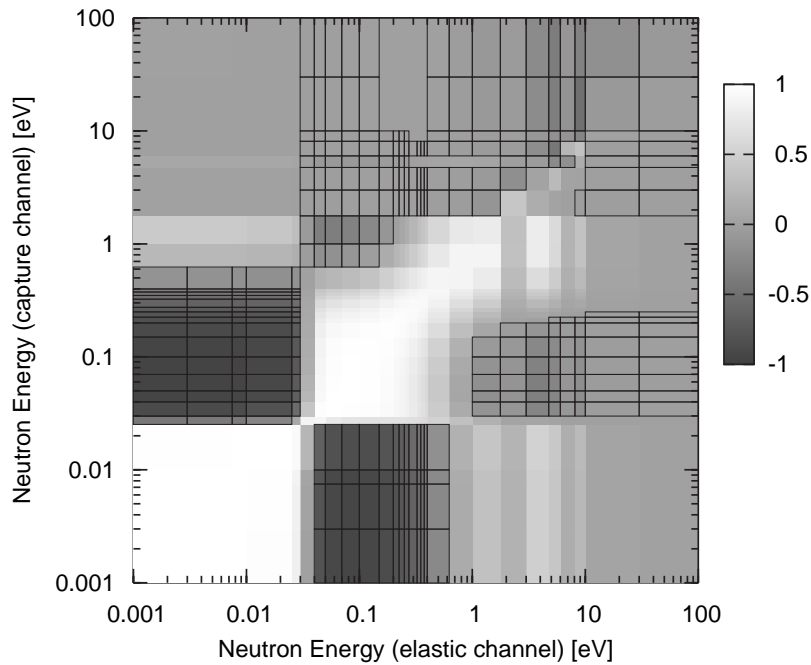


Fig. 15: Correlation matrix of  $^{155}\text{Gd}$  between elastic and capture reactions in the resonance region. The horizontal axis is the energy of elastic scattering, and the vertical axis is the capture energy. The regions surrounded by the solid-line boxes have negative correlations.