

Description and usage of experimental data for evaluation in the resolved resonance region

Subgroup - 36

EC – JRC – IRMM

Standards for Nuclear Safety, Security and Safeguards (SN3S)

- 1) **Status**
- 2) **EXFOR reporting, Meeting 8 – 10 October 2013, IAEA**
- 3) **Activities at IRMM in 2013 – 2014, B. Becker**
 - **AGS, Manual + distribution (OECD/NEA)**
 - **Full Bayesian analysis**
- 4) **Preparation Final report**

Produce accurate cross section data together with reliable covariance information in the resonance region

⇒ **Reduce bias effects**

⇒ **Produce reliable and realistic covariance data**

The main task:

identify and quantify the metrological parameters involved in each step of the evaluation process, starting from the production of experimental data.

Activities:

- (1) Identify the uncertainty components
- (2) Identify methods for evaluating uncertainties in the resonance region using experimental covariance information
- (3) Define and analyse case studies
- (4) Provide recommendations for reporting and usage of experimental details and uncertainty components

Status: finalised

- (1-3) Nuclear data sheets, 113 (2012) 3054 – 3100
ND2013, Becker et al.
- (2-3) Additional studies at IRMM: contribution to CW2014, Santa Fe
- (4) Consultants meeting at IAEA
AGS, will be distributed by OECD/NEA

EXFOR, Reporting

- **Consultants' Meeting, 8 to 10 October 2013, IAEA Headquarters, Vienna, Austria**
"EXFOR Data in Resonance Region and Spectrometers' Response Function"
<https://www-nds.iaea.org/index-meeting-crp/CM-RF-2013/>

- **Summary**
 - Report TOF- response function
 - Report full experimental details
 - Recommendation to report data in TOF
 - AGS concept recommended to process TOF-data
 - Templates to report TOF-data

- **Examples**
 - RPI
 - GELINA<https://www-nds.iaea.org/publications/indc/indc-eur-0032.pdf>

Methods to account for all uncertainty components

- **Conventional uncertainty propagation (CUP)** Fröhner, NSE 126 (1997) 1 – 18
- **Monte Carlo (MC)** De Saint Jean et al., NSE 161 (2009) 363 - 370
- **Marginalization (MA)** Habert et al., NSE 166 (2010) 276 - 287

Differ in the way the uncertainty of experimental parameters are taken into account

- ⇒ **Application: NDS 113 (2012) 3054 – 3100 + Becker et al. (ND2013)**
- ⇒ **Problems in understanding results: more studies required**
results reported at CW2014, Santa Fe

Unresolved resonance region

$$\chi^2(\vec{\theta}) = (\mathbf{Z}_{\text{exp}} - \mathbf{Z}_M(t, \vec{\theta}))^T \mathbf{V}_{\mathbf{Z}_{\text{exp}}}^{-1} (\mathbf{Z}_{\text{exp}} - \mathbf{Z}_M(t, \vec{\theta}))$$

$$\vec{\theta} = (\vec{\eta}, \vec{\kappa}) \begin{cases} \vec{\eta}: \text{resonance parameters} \\ \vec{\kappa}: \text{experimental parameters} \end{cases}$$

$$\vec{\theta} = (\mathbf{G}_{\vec{\theta}}^T \mathbf{V}_{\mathbf{Z}_{\text{exp}}}^{-1} \mathbf{G}_{\vec{\theta}})^{-1} (\mathbf{G}_{\vec{\theta}}^T \mathbf{V}_{\mathbf{Z}_{\text{exp}}}^{-1} \mathbf{Z}_{\text{exp}})$$

$$\mathbf{V}_{\vec{\theta}} = (\mathbf{G}_{\vec{\theta}}^T \mathbf{V}_{\mathbf{Z}_{\text{exp}}}^{-1} \mathbf{G}_{\vec{\theta}})^{-1}$$



Conventional uncertainty propagation (CUP)

$$\mathbf{Z}_{\text{exp}} = \begin{cases} \langle \sigma_{\text{tot,exp}} \rangle \\ \langle \sigma_{\gamma,\text{exp}} \rangle \\ \cdot \\ \cdot \\ \cdot \\ \vec{\eta} \\ \vec{\kappa} \end{cases}$$

$$\langle \sigma_{\text{tot,M}} \rangle = \frac{1}{N_{\sigma_{\text{tot}}}} f(R_l, S_l, T_{\gamma,l}) \quad \langle \sigma_{\gamma,M} \rangle = \frac{1}{N_{\sigma_{\gamma}}} g(R_l, S_l, T_{\gamma,l})$$

- **Include normalization as fit parameter**
 ⇒ **avoids PPP**
in URR due to limitations of the model !



PPP in URR for $^{103}\text{Rh}(n,\gamma)$

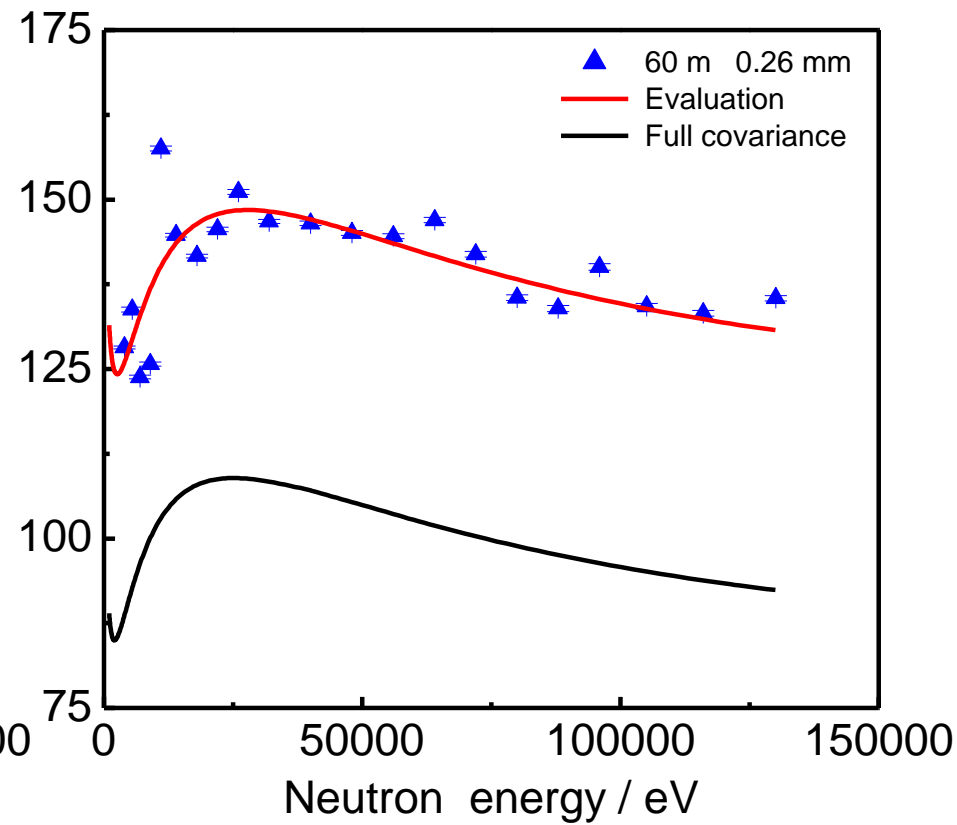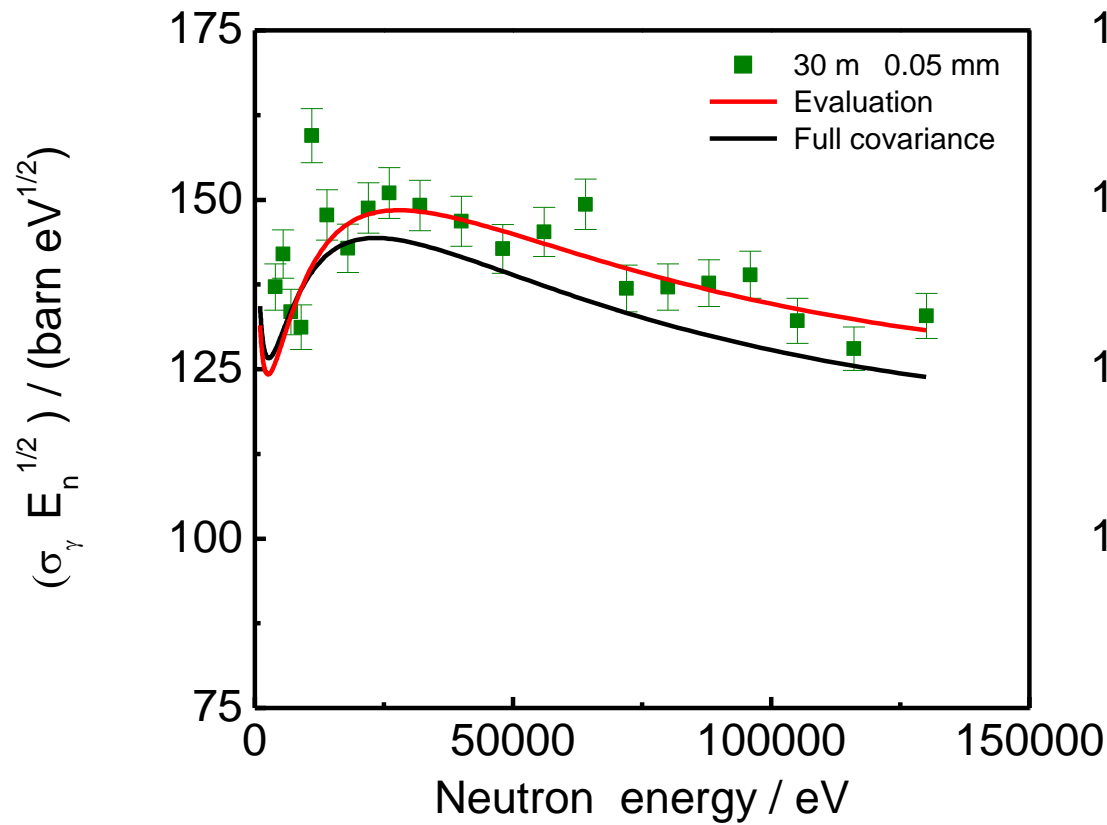

Example URR : $\sigma(n,\text{tot})$ and $\sigma(n,\gamma)$ for ^{197}Au





- **Transmission at 50 m (GELINA) :** T_{exp} with $u_{N_{\sigma_{\text{tot}}}} / N_{\sigma_{\text{tot}}} = 2.0 \%$ (normalization)
Sirakov et al., Eur. J. Phys. A 49 (2013) 1 - 10
- **Capture at 12.5 m (GELINA) :** Y_{exp} with $u_{N_{\sigma_{\gamma}}} / N_{\sigma_{\gamma}} = 1.5 \%$ (normalization)
Massimi et al., submitted to Eur. J. Phys. A
- **Hauser – Feshbach + WF :** $(R_{\ell}, S_{\ell}, T_{\gamma, \ell})$

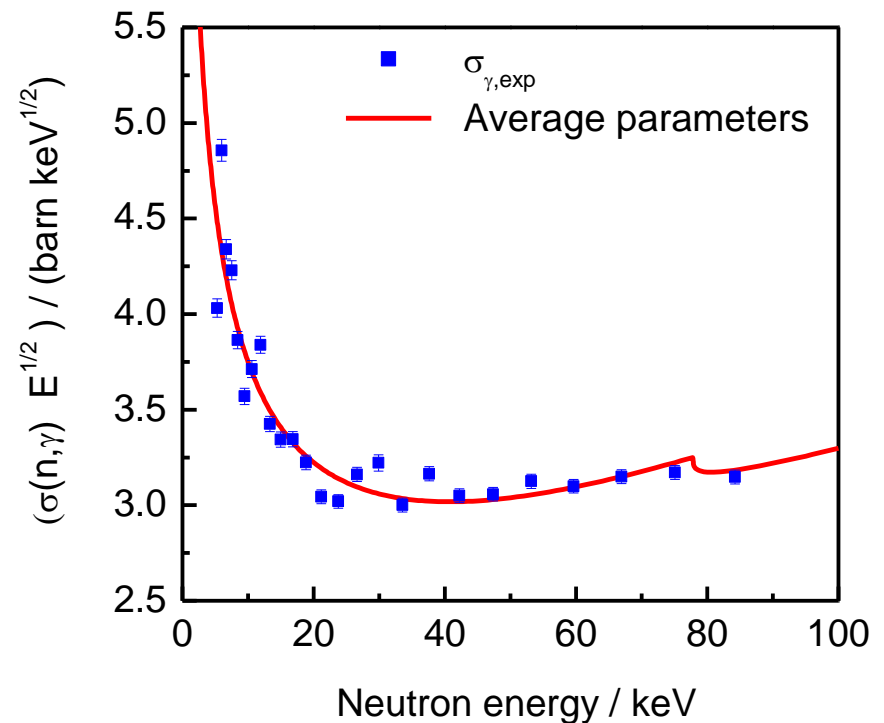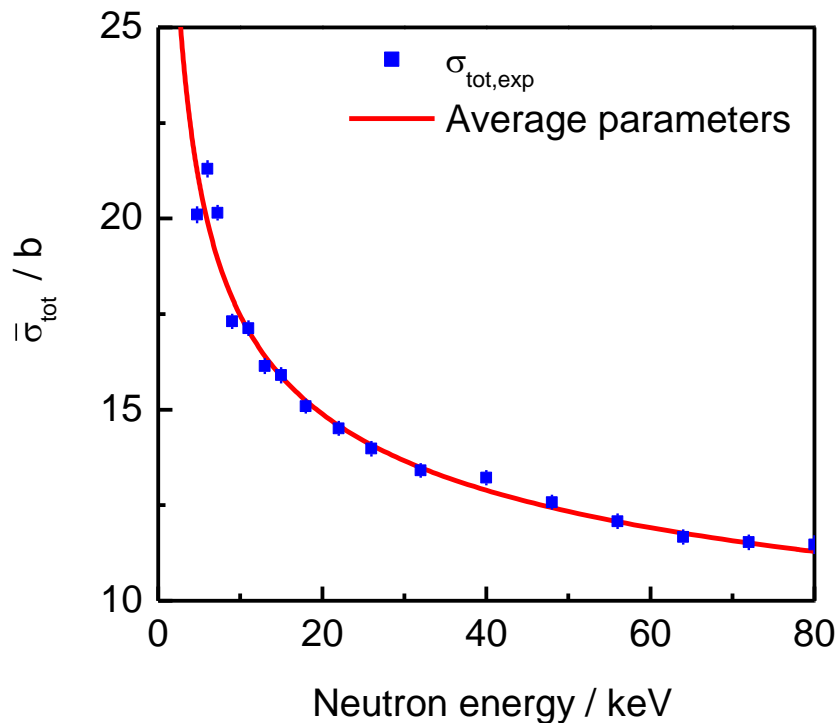

Parameter covariance matrix (GLSQ + CUP)

| Parameter | 100 x (u_θ/θ) | $\rho(\theta,\theta') \times 100$ | | | | | | | |
|---------------------------|-----------------------------|-----------------------------------|-------|------------|-------|-------|-----------------|-----------------|-----|
| | | N_T | N_c | R^∞ | S_0 | S_1 | T_γ^{2+} | T_γ^{2-} | |
| N_{tot} | 1.00 | 2.0 → 1.9 | 100 | 0 | 94 | -68 | -12 | 22 | -2 |
| N_{oy} | 1.00 | 1.5 → 1.5 | | 100 | 1 | 2 | 8 | -84 | -5 |
| R^∞ / fm | -0.163 | 10.1 | | | 100 | -44 | 5 | 8 | -14 |
| $S_0 / 10^{-4}$ | 1.89 | 1.8 | | | | 100 | 35 | -40 | -12 |
| $S_1 / 10^{-5}$ | 2.84 | 10.8 | | | | | 100 | -52 | -82 |
| $T_\gamma^{2+} / 10^{-2}$ | 3.44 | 2.8 | | | | | | 100 | 65 |
| $T_\gamma^{2-} / 10^{-2}$ | 1.62 | 7.8 | | | | | | | 100 |

Cross Section Uncertainty

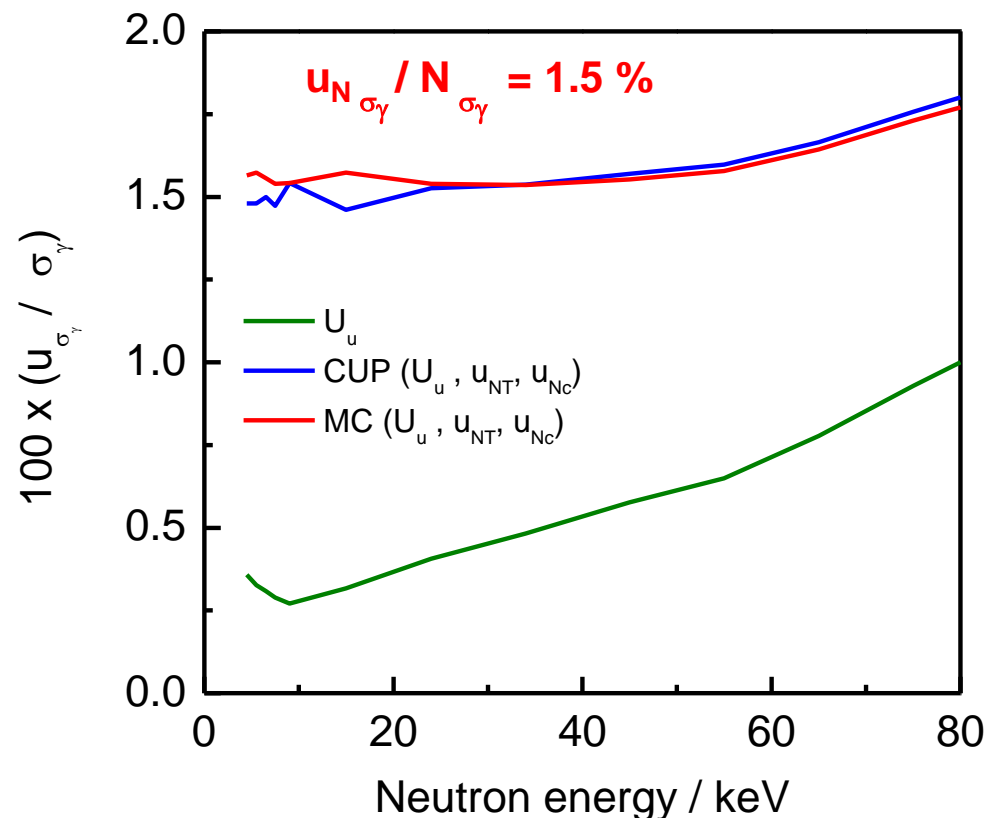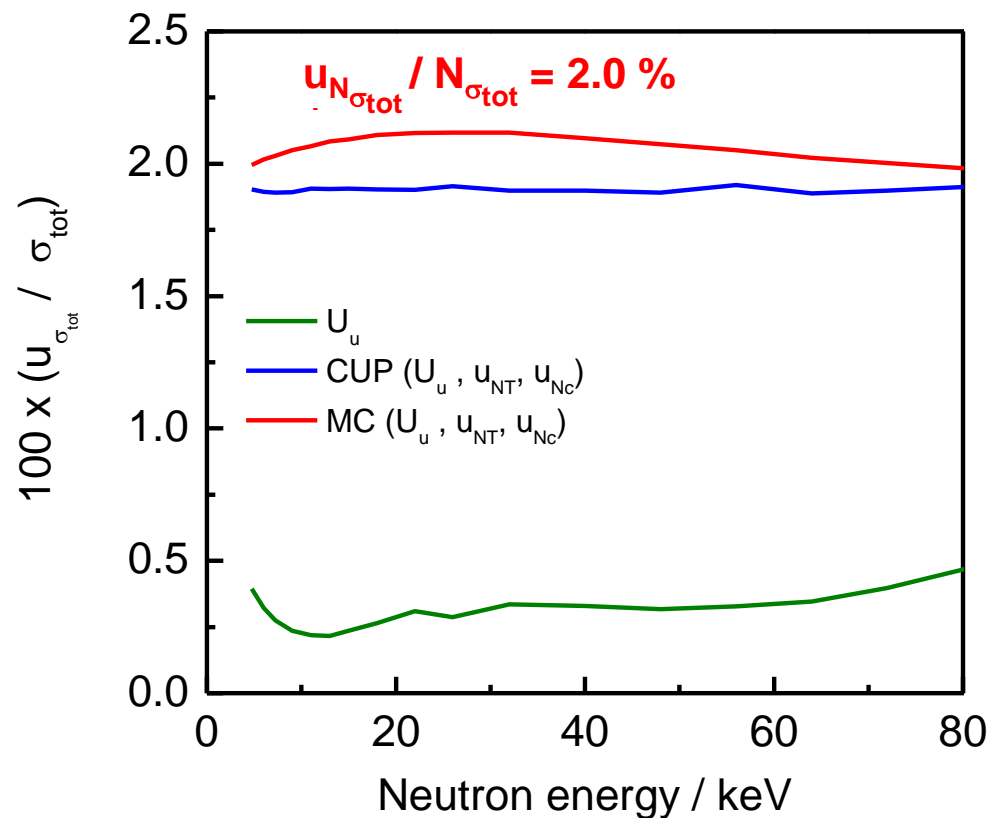

CUP : normalization uncertainties u_{NT} and u_{Nc} propagate to

- reaction model parameters and
- evaluated cross sections

Monte Carlo + LSQ : De Saint Jean et al., NSE 161 (2009) 363 – 370

GLSQ : Resolved resonance region



$$\chi^2(\vec{\theta}) = (Z_{\text{exp}} - Z_M(t, \vec{\theta}))^T V_{Z_{\text{exp}}}^{-1} (Z_{\text{exp}} - Z_M(t, \vec{\theta}))$$

$$\vec{\theta} = (\mathbf{G}_{\vec{\theta}}^T V_{Z_{\text{exp}}}^{-1} \mathbf{G}_{\vec{\theta}})^{-1} (\mathbf{G}_{\vec{\theta}}^T V_{Z_{\text{exp}}}^{-1} Z_{\text{exp}})$$

$$V_{\vec{\theta}} = (\mathbf{G}_{\vec{\theta}}^T V_{Z_{\text{exp}}}^{-1} \mathbf{G}_{\vec{\theta}})^{-1}$$

Conventional uncertainty propagation (CUP)

$$Z_{\text{exp}} = \begin{cases} T_{\text{exp}} \\ Y_{\text{exp}} \\ \cdot \\ \cdot \\ \vec{\eta} \\ \vec{\kappa} \end{cases}$$

$$T_M(t, \vec{\theta}) = \frac{1}{N_T} \frac{\int R(t, E) T'(E) dE}{\int R(t, E) dE}$$

$$T'(E) = e^{-\sum_k n_k \bar{\sigma}_{\text{tot},k}}$$

$$Y_M(t, \vec{\theta}) = \frac{1}{N_C} \frac{\int R(t, E) Y'(E) dE}{\int R(t, E) dE}$$

$$Y'(E) = (1 - e^{-\sum_k n_k \bar{\sigma}_{\text{tot},k}}) \frac{\bar{\sigma}_{\gamma,k}}{\bar{\sigma}_{\text{tot},k}} + \dots$$

GLSQ : include κ as adjustable parameter



$$\chi^2(\vec{\theta}) = (\mathbf{Z}_{\text{exp}} - \mathbf{Z}_M(t, \vec{\theta}))^T \mathbf{V}_{\mathbf{Z}_{\text{exp}}}^{-1} (\mathbf{Z}_{\text{exp}} - \mathbf{Z}_M(t, \vec{\theta}))$$

Fröhner, Nucl. Sci. Eng. 126 (1997) 1 – 18
JEFF Report 18

$$\vec{\theta} = (\vec{\eta}, \vec{\kappa}) \begin{cases} \vec{\eta}: \text{resonance parameters} \\ \vec{\kappa}: \text{experimental parameters} \end{cases}$$

$$\vec{\theta} = (\mathbf{G}_{\vec{\theta}}^T \mathbf{V}_{\mathbf{Z}_{\text{exp}}}^{-1} \mathbf{G}_{\vec{\theta}})^{-1} (\mathbf{G}_{\vec{\theta}}^T \mathbf{V}_{\mathbf{Z}_{\text{exp}}}^{-1} \mathbf{Z}_{\text{exp}})$$

$$\mathbf{V}_{\vec{\theta}} = (\mathbf{G}_{\vec{\theta}}^T \mathbf{V}_{\mathbf{Z}_{\text{exp}}}^{-1} \mathbf{G}_{\vec{\theta}})^{-1}$$

Conventional uncertainty propagation (CUP)

$$\mathbf{Z}_{\text{exp}} = \begin{cases} T_{\text{exp}} \\ Y_{\text{exp}} \\ \cdot \\ \cdot \\ \vec{\eta} \\ \vec{\kappa} \end{cases}$$

$$T_M(t, \vec{\theta}) = \frac{1}{N_T} \frac{\int R(t, E) T'(E) dE}{\int R(t, E) dE} \quad T'(E) = e^{-\sum_k \eta_k \bar{\sigma}_{\text{tot},k}}$$

- **Consider prior as experimental data ($\theta \in \mathbf{Z}_{\text{exp}}$)**
 - ⇒ allows correlation between prior and new (updating) data (not possible in Bayesian updating fitting approach)
- **Include experimental parameters as fit parameter (\equiv including u_N in $\mathbf{V}_{\mathbf{Z}_{\text{exp}}}$)**
 - ⇒ avoids PPP
 - ⇒ allows full correlation between updating experimental data
 - ⇒ verify the influence of u_{κ} on nuclear model parameters

Normalization uncertainty : RP from $Y_{\text{exp},\gamma}$

Normalization capture data
(external)


Y_{exp} with $u_N / N \approx 2\%$

$^{197}\text{Au} + n$

$E_r = 4.9 \text{ eV}$

$\Gamma_n = 0.015 \text{ eV}$

$\Gamma_\gamma = 0.122 \text{ eV}$

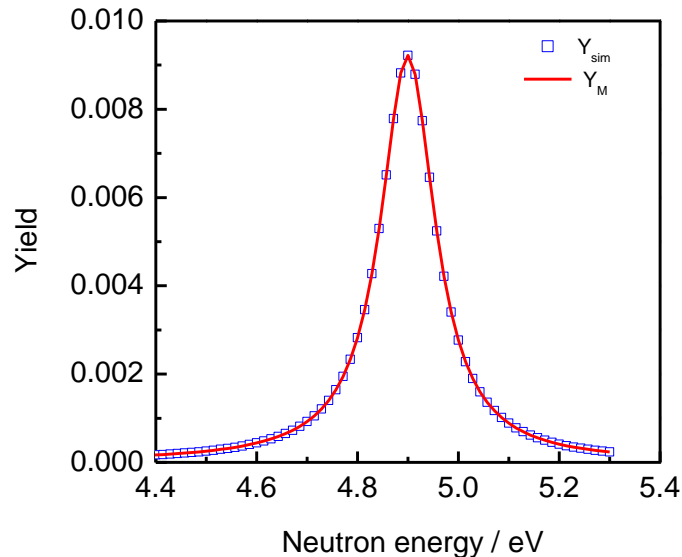

| Peak uncertainty (counts) | $Y \approx n\sigma_\gamma$ | | |
|-----------------------------------|----------------------------|-------|-------|
| | CUP | | |
| | 10 % | 1% | 0.1 % |
| u_N/N | 0.019 | 0.019 | 0.019 |
| u_{Γ_n}/Γ_n | 0.025 | 0.022 | 0.022 |
| $u_{\Gamma_\gamma}/\Gamma_\gamma$ | 0.018 | 0.003 | 0.003 |
| $\rho(N,\Gamma_n)$ | -0.90 | -1.00 | -1.00 |
| $\rho(N,\Gamma_\gamma)$ | 0.15 | 0.84 | 1.00 |
| $\rho(\Gamma_n,\Gamma_\gamma)$ | -0.23 | -0.85 | -1.00 |

$$Y_M \approx n\sigma_\gamma$$

- \Rightarrow normalization uncertainty $u_N / N \approx 2\%$ remains independent of counting statistics
- \Rightarrow u_N propagates fully to the uncertainty of Γ_n

Normalization uncertainty : RP from $Y_{\text{exp},\gamma}$

Normalization capture data
(external)


Y_{exp} with $u_N / N \approx 2\%$

$^{197}\text{Au} + n$

$E_r = 4.9 \text{ eV}$

$\Gamma_n = 0.015 \text{ eV}$

$\Gamma_\gamma = 0.122 \text{ eV}$

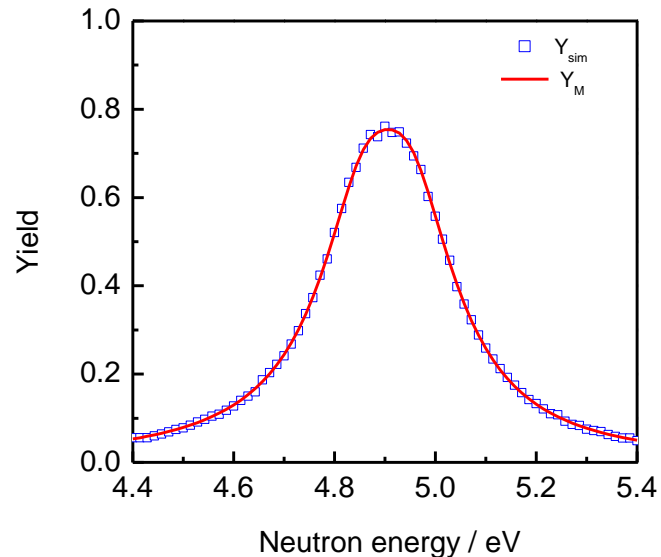

Sample thickness : 0.01 mm

CUP

| Peak uncertainty (counts) | CUP | | |
|-----------------------------------|-------|-------|-------|
| | 10 % | 1% | 0.1 % |
| u_N/N | 0.019 | 0.009 | 0.001 |
| u_{Γ_n}/Γ_n | 0.030 | 0.013 | 0.001 |
| $u_{\Gamma_\gamma}/\Gamma_\gamma$ | 0.022 | 0.006 | 0.001 |
| $\rho(N,\Gamma_n)$ | -0.91 | -1.00 | -1.00 |
| $\rho(N,\Gamma_\gamma)$ | 0.50 | 0.94 | 0.96 |
| $\rho(\Gamma_n,\Gamma_\gamma)$ | -0.67 | -0.96 | -0.97 |

$$Y_M \approx (1 - e^{-n\sigma_{\text{tot}}}) \frac{\sigma_\gamma}{\sigma_{\text{tot}}}$$

- \Rightarrow normalization uncertainty u_N decreases with increasing counting statistics
- \Rightarrow u_N has no impact on Γ_n in case of high precision data

Normalization uncertainty : RP from $Y_{\text{exp},\gamma}$



Normalization capture data
(external)

Y_{exp} with $u_N / N = 2\%$

CUP + GLSQ

Final normalization uncertainty and its impact on nuclear model parameters depend on:

- on the precision of the data
- target thickness

| Peak uncertainty (counts) | $Y \approx n\sigma_\gamma$ | | |
|-----------------------------------|----------------------------|-------|-------|
| | CUP | | |
| | 10% | 1% | 0.1% |
| u_N/N | 0.019 | 0.019 | 0.019 |
| u_{Γ_n}/Γ_n | 0.025 | 0.022 | 0.022 |
| $u_{\Gamma_\gamma}/\Gamma_\gamma$ | 0.018 | 0.003 | 0.003 |
| $\rho(N, \Gamma_n)$ | -0.90 | -1.00 | -1.00 |
| $\rho(N, \Gamma_\gamma)$ | 0.15 | 0.84 | 1.00 |
| $\rho(\Gamma_n, \Gamma_\gamma)$ | -0.23 | -0.85 | -0.97 |

| Peak uncertainty (counts) | Sample thickness : 0.010 mm | | |
|-----------------------------------|-----------------------------|-------|-------|
| | CUP | | |
| | 10% | 1% | 0.1% |
| u_N/N | 0.019 | 0.009 | 0.001 |
| u_{Γ_n}/Γ_n | 0.030 | 0.013 | 0.001 |
| $u_{\Gamma_\gamma}/\Gamma_\gamma$ | 0.022 | 0.006 | 0.001 |
| $\rho(N, \Gamma_n)$ | -0.91 | -1.00 | -1.00 |
| $\rho(N, \Gamma_\gamma)$ | 0.50 | 0.94 | 0.96 |
| $\rho(\Gamma_n, \Gamma_\gamma)$ | -0.67 | -0.96 | -0.97 |

Normalization uncertainty : RP from $Y_{\text{exp},\gamma}$



Normalization capture data
(external)

Y_{exp} with $u_N / N = 2\%$

CUP + GLSQ

Final normalization uncertainty and its impact on nuclear model parameters depend on:

- on the precision of the data
- target thickness

Monte Carlo + GLSQ

De Saint Jean et al., NSE 161 (2009) 363 – 370

Normalization

- Is not updated (by constraint)
- Has a direct impact on u_{Γ_n} and u_{Γ_γ} also in case of high precision data



| Peak uncertainty (counts) | $Y \approx n\sigma_\gamma$ | | | | | |
|-----------------------------------|----------------------------|-------|-------|-------|-------|-------|
| | CUP | | | MC | | |
| | 10% | 1% | 0.1% | 10% | 1% | 0.1% |
| u_N/N | 0.019 | 0.019 | 0.019 | | | |
| u_{Γ_n}/Γ_n | 0.025 | 0.022 | 0.022 | 0.025 | 0.022 | 0.021 |
| $u_{\Gamma_\gamma}/\Gamma_\gamma$ | 0.018 | 0.003 | 0.003 | 0.018 | 0.003 | 0.002 |
| $\rho(N, \Gamma_n)$ | -0.90 | -1.00 | -1.00 | | | |
| $\rho(N, \Gamma_\gamma)$ | 0.15 | 0.84 | 1.00 | | | |
| $\rho(\Gamma_n, \Gamma_\gamma)$ | -0.23 | -0.85 | -0.97 | -0.14 | -0.84 | -1.00 |

| Peak uncertainty (counts) | Sample thickness : 0.010 mm | | | | | |
|-----------------------------------|-----------------------------|-------|-------|-------|-------|-------|
| | CUP | | | MC | | |
| | 10% | 1% | 0.1% | 10% | 1% | 0.1% |
| u_N/N | 0.019 | 0.009 | 0.001 | | | |
| u_{Γ_n}/Γ_n | 0.030 | 0.013 | 0.001 | 0.042 | 0.037 | 0.039 |
| $u_{\Gamma_\gamma}/\Gamma_\gamma$ | 0.022 | 0.006 | 0.001 | 0.031 | 0.020 | 0.021 |
| $\rho(N, \Gamma_n)$ | -0.91 | -1.00 | -1.00 | | | |
| $\rho(N, \Gamma_\gamma)$ | 0.50 | 0.94 | 0.96 | | | |
| $\rho(\Gamma_n, \Gamma_\gamma)$ | -0.67 | -0.96 | -0.97 | -0.35 | -0.99 | -1.00 |

Uncertainty on $\sigma(n, \gamma)$: Y_{exp}



Y_{exp} with $u_N / N = 2\%$

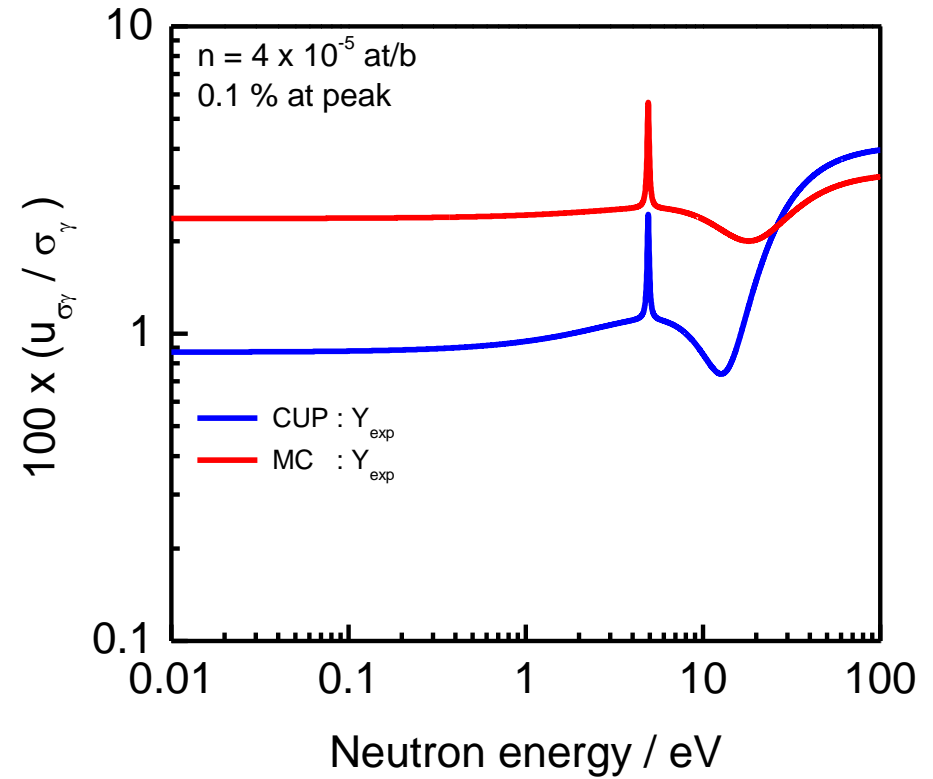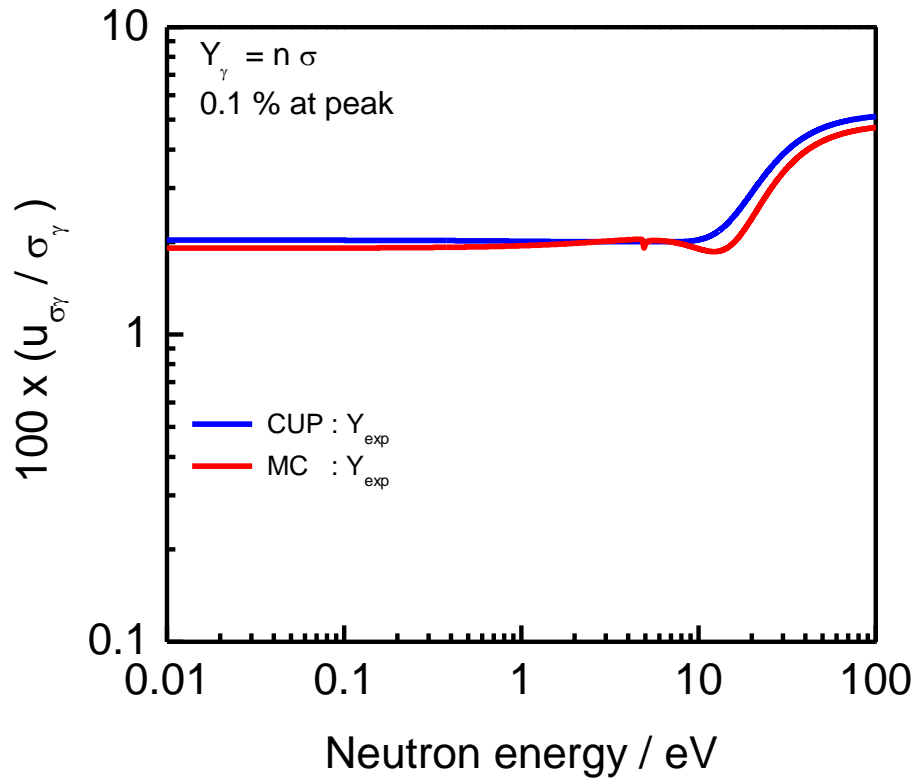

▪ **Bayes' theorem:**

$$P(\theta|Z) = \frac{P(Z|\theta) P(\theta)}{P(Z)}$$


- $P(\theta)$: Prior probability distribution gets updated
 - $P(Z|\theta)$: Likelihood of acquired additional data Z (transmission, yield, ...)
 - $P(\theta|Z)$: Updated posterior probability distribution
- $P(\theta)$ and $P(Z|\theta)$ based on maximum entropy

▪ **Example: RP derived from Y_{exp} for $E_r = 4.9$ eV of ^{197}Au , (0.02 mm thick sample)**

- $P(\theta)$ prior for $\theta = (\eta, \kappa)$
 - $N_c = 1.00 \pm 0.02$: normal distribution
 - $(\Gamma_n, \Gamma_\gamma)$: non-informative prior (Γ_n & $\Gamma_\gamma > 0$), Jeffrey's prior
- $P(Y_M|\theta)$ likelihood of yield
 - $(Y_{\text{exp}}, V_{y_{\text{exp}}})$: normal distribution

$$P(Y_M|\theta) = \frac{1}{\sqrt{\det(2\pi V_Y)}} e^{-\frac{1}{2}(Y_{\text{exp}} - Y_M(\theta))^T V_Y^{-1} (Y_{\text{exp}} - Y_M(\theta))}$$

Capture measurements for ^{197}Au



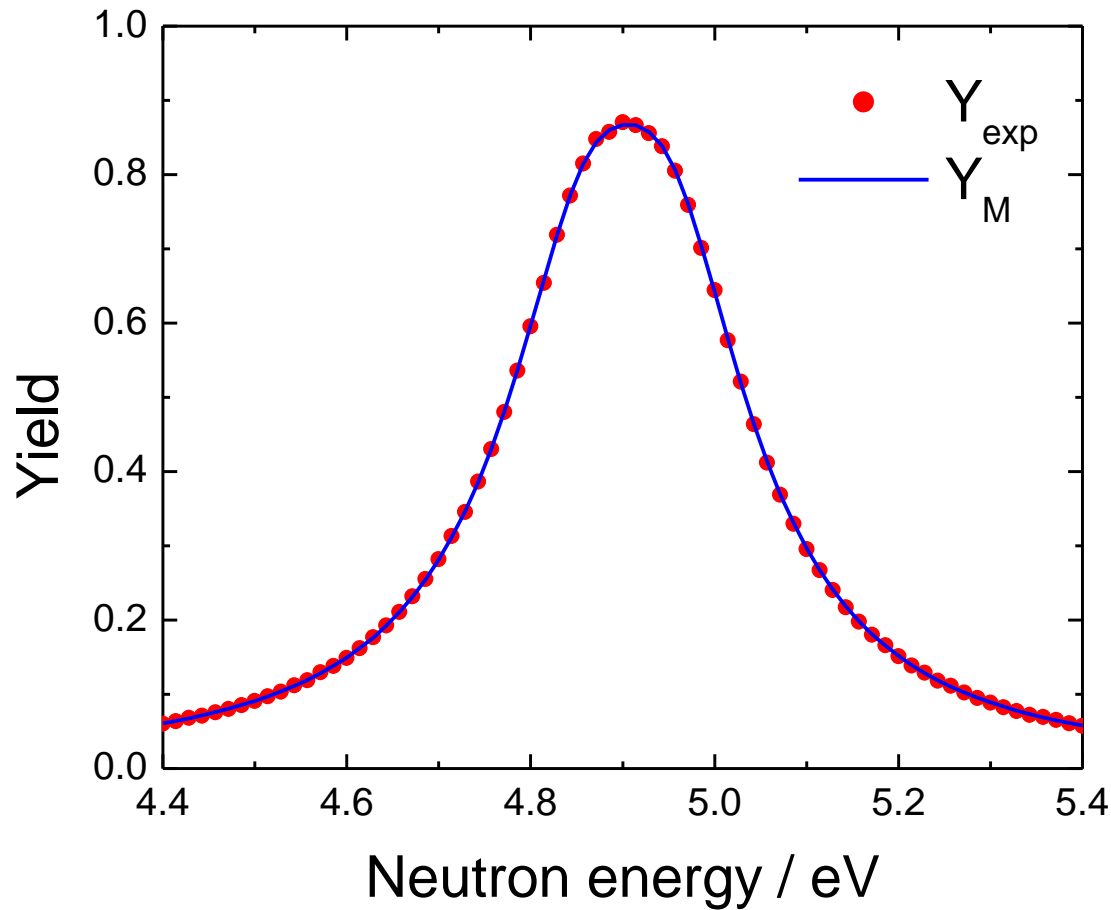


$$^{197}\text{Au} + n$$
$$E_r = 4.9 \text{ eV}$$
$$\Gamma_n = 0.015 \text{ eV}$$
$$\Gamma_\gamma = 0.122 \text{ eV}$$

Generated test case:

- Large yield with extreme small counting statistics uncertainties (0.2% in the peak)
- Randomized data points

Posterior distributions $P(N, \Gamma_n, \Gamma_\gamma)$

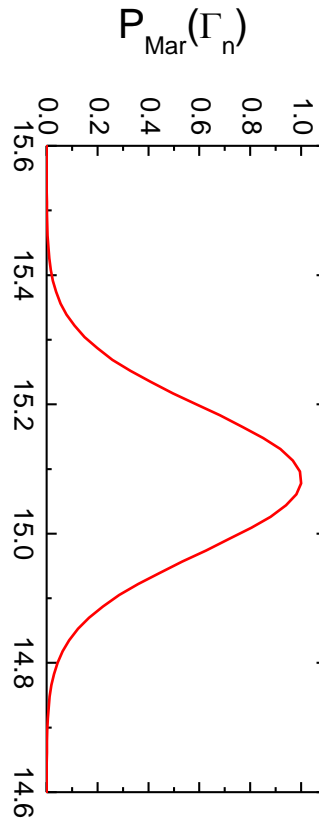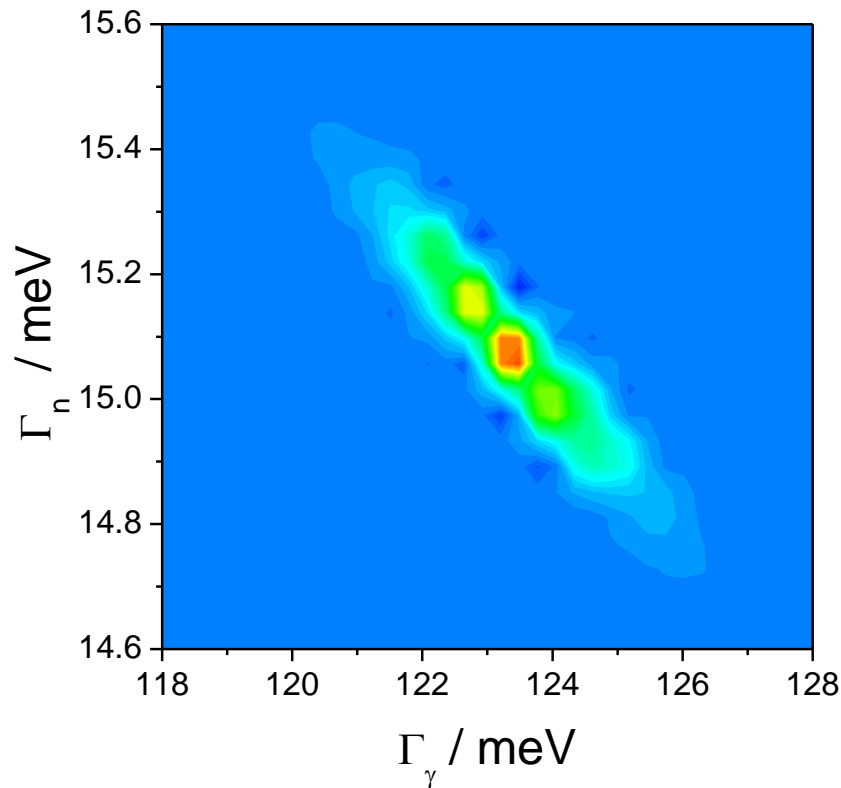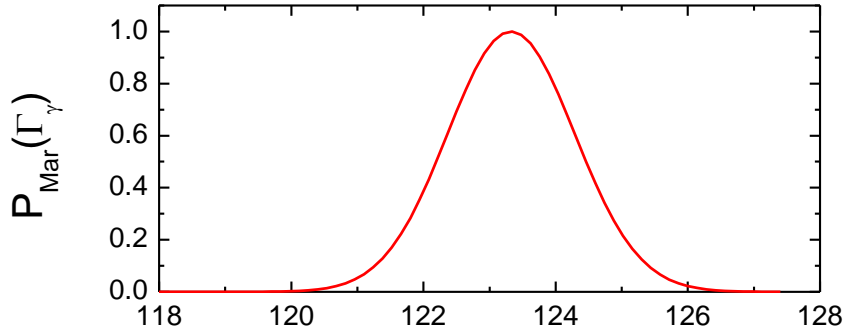

$$\begin{aligned} &^{197}\text{Au} + n \\ E_r &= 4.9 \text{ eV} \\ \Gamma_n &= 0.015 \text{ eV} \\ \Gamma_\gamma &= 0.122 \text{ eV} \end{aligned}$$


1st and 2nd moment of
marginalized distribution:
 $N = 1.0001 \pm 0.0009$
 $\Gamma_n = 0.0151 \pm 0.0001 \text{ eV}$
 $\Gamma_\gamma = 0.1233 \pm 0.0010 \text{ eV}$

GLSQ + CUP

$$\begin{aligned} N &= 1.0000 \pm 0.0008 \\ \Gamma_n &= 0.0151 \pm 0.0001 \text{ eV} \\ \Gamma_\gamma &= 0.1233 \pm 0.0010 \text{ eV} \end{aligned}$$

≠ MC

Capture measurements for ^{197}Au

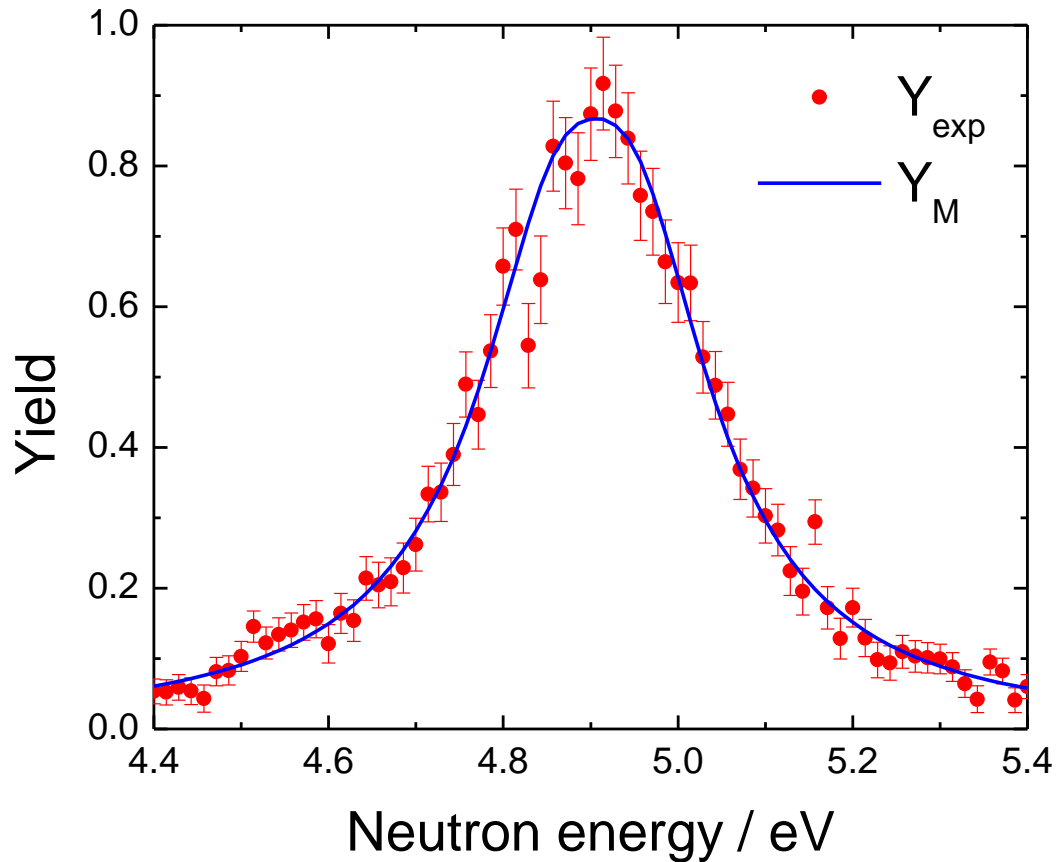


$$^{197}\text{Au} + n$$
$$E_r = 4.9 \text{ eV}$$
$$\Gamma_n = 0.015 \text{ eV}$$
$$\Gamma_\gamma = 0.122 \text{ eV}$$

Generated test case:

- Large yield with relatively large counting statistics uncertainties
- Randomized data points

Posterior distributions $P(N, \Gamma_n, \Gamma_\gamma)$

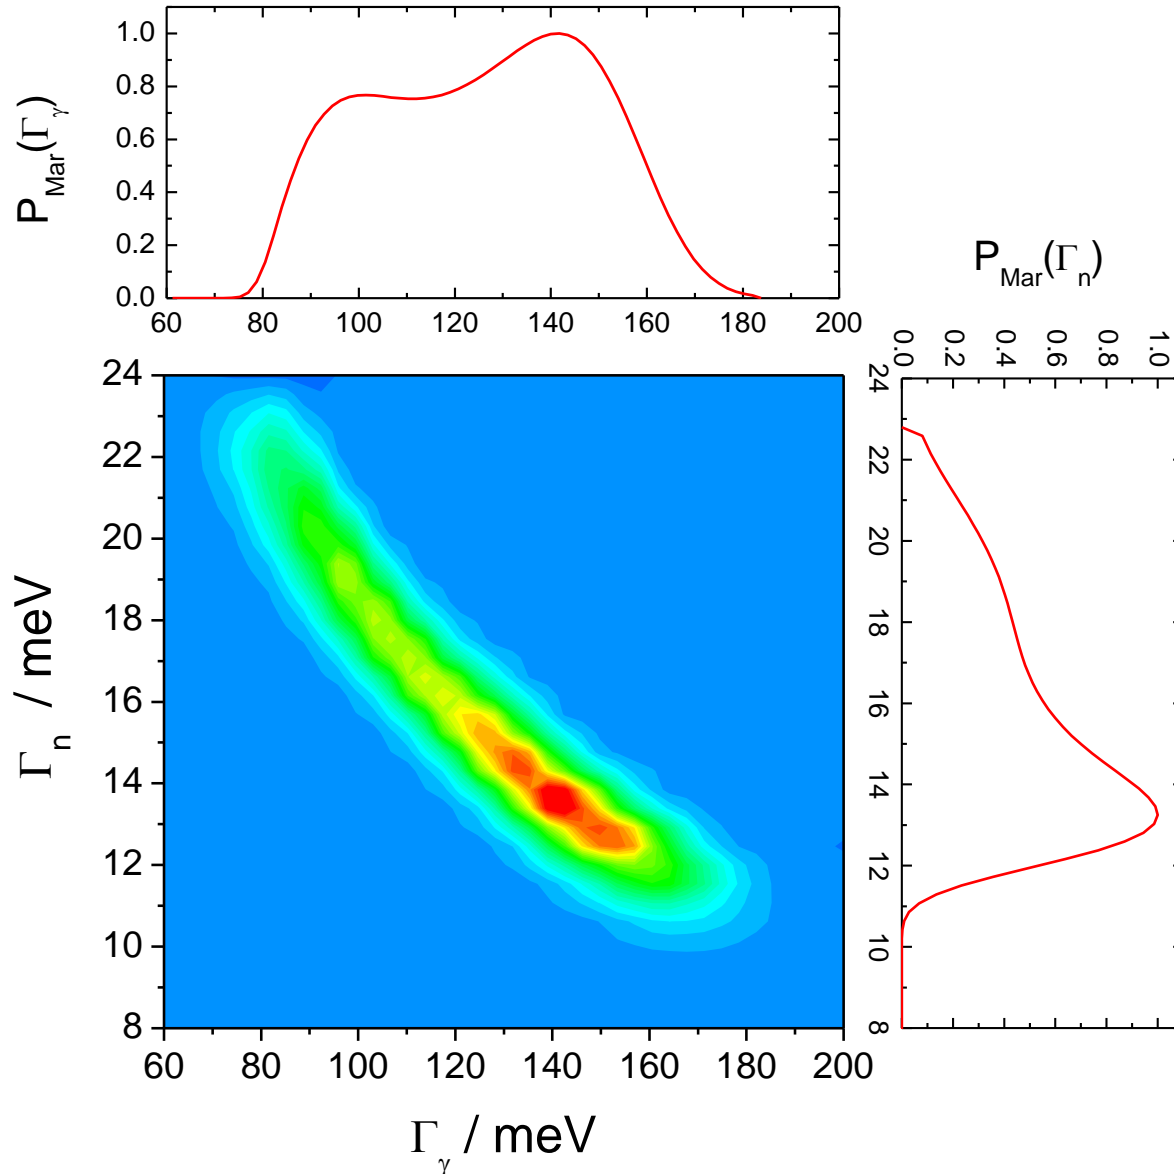

$$\begin{aligned} &^{197}\text{Au} + n \\ E_r &= 4.9 \text{ eV} \\ \Gamma_n &= 0.015 \text{ eV} \\ \Gamma_\gamma &= 0.122 \text{ eV} \end{aligned}$$

1st and 2nd moment of
marginalized distribution:
 $N = 1.00 \pm 0.018$
 $\Gamma_n = 0.016 \pm 0.003 \text{ eV}$
 $\Gamma_\gamma = 0.126 \pm 0.022 \text{ eV}$

GLSQ + CUP
 $N = 1.00 \pm 0.019$
 $\Gamma_n = 0.013 \pm 0.002 \text{ eV}$
 $\Gamma_\gamma = 0.143 \pm 0.017 \text{ eV}$

Max. likelihood

Resonance parameters + covariances in RRR



$$\chi^2(\vec{\theta}) = (\mathbf{Z}_{\text{exp}} - \mathbf{Z}_M(t, \vec{\theta}))^T \mathbf{V}_{\mathbf{Z}_{\text{exp}}}^{-1} (\mathbf{Z}_{\text{exp}} - \mathbf{Z}_M(t, \vec{\theta}))$$

$$\vec{\theta} = (\vec{\eta}, \vec{\kappa}) \begin{cases} \vec{\eta}: \text{resonance parameters} \\ \vec{\kappa}: \text{experimental parameters} \end{cases}$$

$$\vec{\theta} = (\mathbf{G}_{\vec{\theta}}^T \mathbf{V}_{\mathbf{Z}_{\text{exp}}}^{-1} \mathbf{G}_{\vec{\theta}})^{-1} (\mathbf{G}_{\vec{\theta}}^T \mathbf{V}_{\mathbf{Z}_{\text{exp}}}^{-1} \mathbf{Z}_{\text{exp}}) \quad (\text{LSQ})$$

$$\mathbf{V}_{\vec{\theta}} = (\mathbf{G}_{\vec{\theta}}^T \mathbf{V}_{\mathbf{Z}_{\text{exp}}}^{-1} \mathbf{G}_{\vec{\theta}})^{-1} \quad (\text{CUP})$$

$$\mathbf{Z}_{\text{exp}} = \begin{cases} T_{\text{exp}} \\ Y_{\text{exp}} \\ \cdot \\ \cdot \\ \cdot \\ \vec{\eta} \end{cases}$$

$$Y_M(t, \vec{\theta}) = \frac{1}{N_c} \frac{\int R(t, E) Y'(E) dE}{\int R(t, E) dE} \quad Y'(E) = (1 - e^{-\sum_k n_k \bar{\sigma}_{\text{tot}, k}}) \frac{\bar{\sigma}_{\gamma, k}}{\bar{\sigma}_{\text{tot}, k}} + \dots$$

- No direct measurement of the cross section
- Interpretation model depends on RP and experimental parameters
- **GLSQ + CUP relies on a perfect model (reaction + experiment)**


$$P(\theta|Z, M) \propto P(Z|\theta, M) P(\theta)$$

Experimental model : γ -ray attenuation in REFIT




Y_M : REFIT + ENDF/B-VI.1

$\sigma(n_{th}, \gamma) = (98.7 \pm 0.1)$ b cross section standard

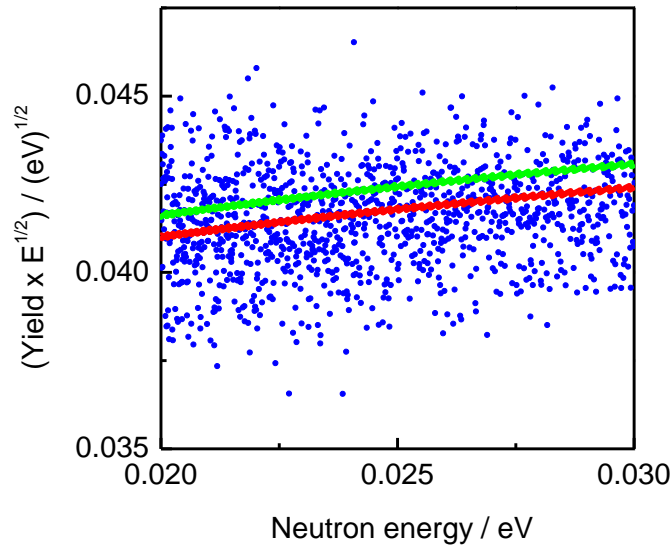

Internal normalization capture data

Y_{exp} with $u_N / N \approx 1\%$

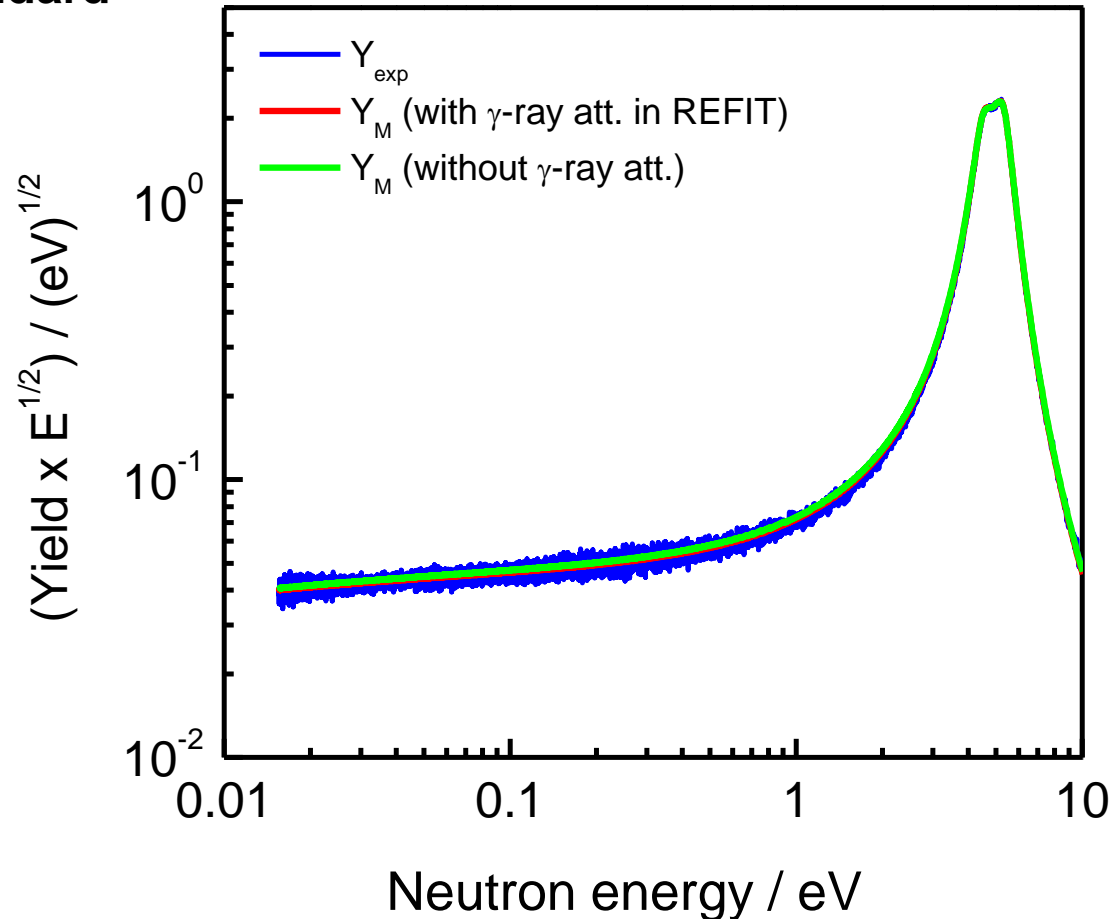

Y_M using REFIT :

$\sigma(n_{th}, \gamma) = 98.7$ with γ -ray correction
 $\Rightarrow (99 \pm 1)$ b

$\sigma(n_{th}, \gamma) = 98.7$ without γ -ray correction
 $\Rightarrow (97 \pm 1)$ b, i.e. biased by 1.5%

Validation of resonance parameters by NRTA

- **Covariances for W isotopes (NDS, various publications)**

- **Validation experiment: determine areal density by NRTA**
 - **Sample: metallic disc of ^{nat}W**
 - Homogeneous sample
 - Areal density n : from weight and area

$\Rightarrow u_n/n < 0.1 \%$

 - **Transmission : absolute measurement**
 - Absolute measurement
 - Methodology well understood (background, dead time correction,...)

Nuclear Data Sheets 113 (2012) 3054 – 3100

$\Rightarrow u_{T_{exp}}/T_{exp} < 0.3 \%$


- \Rightarrow **One of the most accurate integral experiment to validate resonance parameters**

Validation of resonance parameters by NRTA

Transmission measurements

- a 25 m station of GELINA
- ^6Li detector

Y_M : REFIT

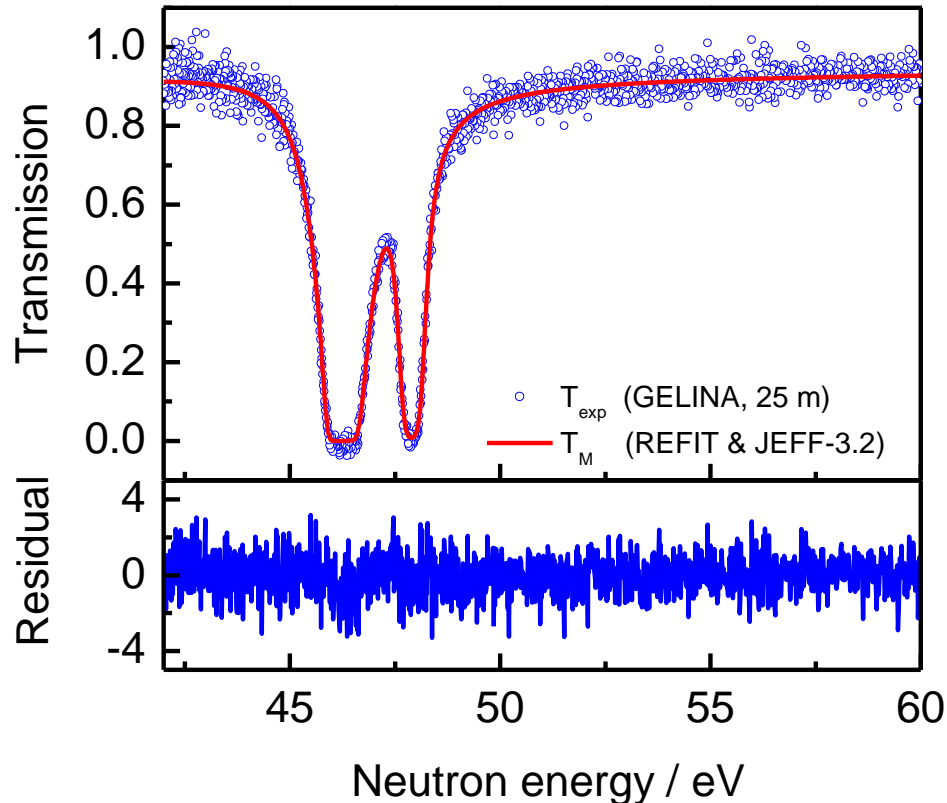

Least squares adjustment (REFIT)

$$T_M(t, \vec{\theta}) = \frac{\int R(t, E) e^{-\sum_k \eta_k \bar{\sigma}_{\text{tot},k}} dE}{\int R(t, E) dE}$$

$$\vec{\theta} = (\vec{\eta}, \vec{\kappa}) \begin{cases} \vec{\eta} : \text{resonance parameters} \\ \vec{\kappa} : \text{experimental parameters} \end{cases}$$

$$\vec{\theta} = (\mathbf{G}_{\vec{\theta}}^T \mathbf{V}_{T_{\text{exp}}}^{-1} \mathbf{G}_{\vec{\theta}})^{-1} (\mathbf{G}_{\vec{\theta}}^T \mathbf{V}_{T_{\text{exp}}}^{-1} T_{\text{exp}})$$

$$\mathbf{V}_{\vec{\theta}} = (\mathbf{G}_{\vec{\theta}}^T \mathbf{V}_{T_{\text{exp}}}^{-1} \mathbf{G}_{\vec{\theta}})^{-1}$$

$\mathbf{G}_{\vec{\theta}}$: partial derivatives

(non - linear model : solved by iteration)

Validation of resonance parameters by NRTA



| Reference | $E_R = 46.26 \text{ eV}$ | | $E_R = 47.80 \text{ eV}$ | | $100 \times n_{\text{FIT}}/n$ |
|----------------|--------------------------|------------------------------|--------------------------|------------------------------|-------------------------------|
| | Γ_n / meV | $\Gamma_\gamma / \text{meV}$ | Γ_n / meV | $\Gamma_\gamma / \text{meV}$ | |
| ENDF/B - VI.8 | 154 | 69 | 115 | 78 | 109.7 (0.5) |
| JENDL - 3.3 | 154 | 46 | 119 | 81 | 111.3 (0.5) |
| ENDF/B - VII.1 | 154 (0.8) | 46 (2.1) | 119 (1.2) | 81 (5.1) | 111.3 (1.1) |
| JEFF - 3.2 | 163.4 | 75.3 | 120.8 | 61.5 | 100.2 (0.5) |

Overestimation of n compensates for underestimation of Γ_n

Impact of sample characteristics

^{nat}W-powder mixed with ^{nat}S-powder
(80 cm diameter, 14 g ^{nat}W, 3.5 g ^{nat}S)

Declared : $n_W = (1.084 \pm 0.014) 10^{-3}$ at/b

T_M (hom.) : $n_W = (0.939 \pm 0.003) 10^{-3}$ at/b

Heterogeneous sample:

$$\bar{T} = \int T(n') p(n') dn' = \int e^{-n' \sigma_{\text{tot}}} p(n') dn'$$


\neq

$$T(\bar{n}) = e^{-\bar{n} \sigma_{\text{tot}}}$$

Similar bias effects:

-when determining RP from such samples (Γ_n underestimated)

-integral reactor experiments with powder samples

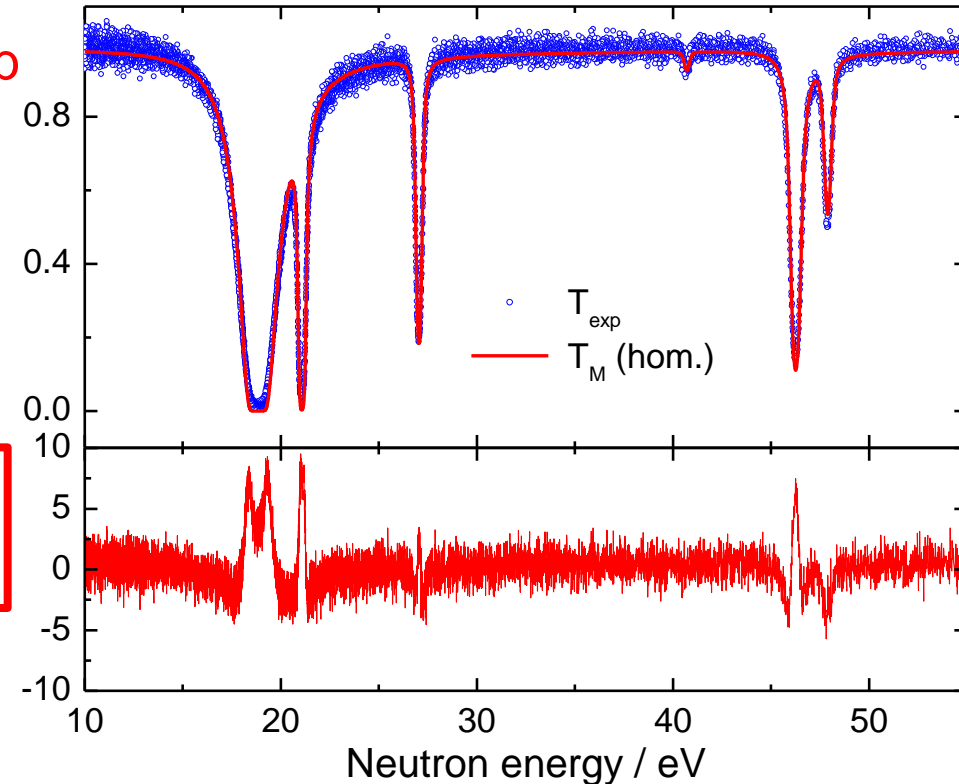

Impact of sample characteristics


^{nat}W-powder mixed with ^{nat}S-powder
(80 cm diameter, 14 g ^{nat}W, 3.5 g ^{nat}S)

Declared : $n_W = (1.084 \pm 0.014) 10^{-3}$ at/b

T_M (hom.) : $n_W = (0.939 \pm 0.003) 10^{-3}$ at/b

T_M (inhom.) : $n_W = (1.096 \pm 0.003) 10^{-3}$ at/b

$$\bar{T} = \int T(n') p(n') dn' = \int e^{-n' \sigma_{\text{tot}}} p(n') dn'$$

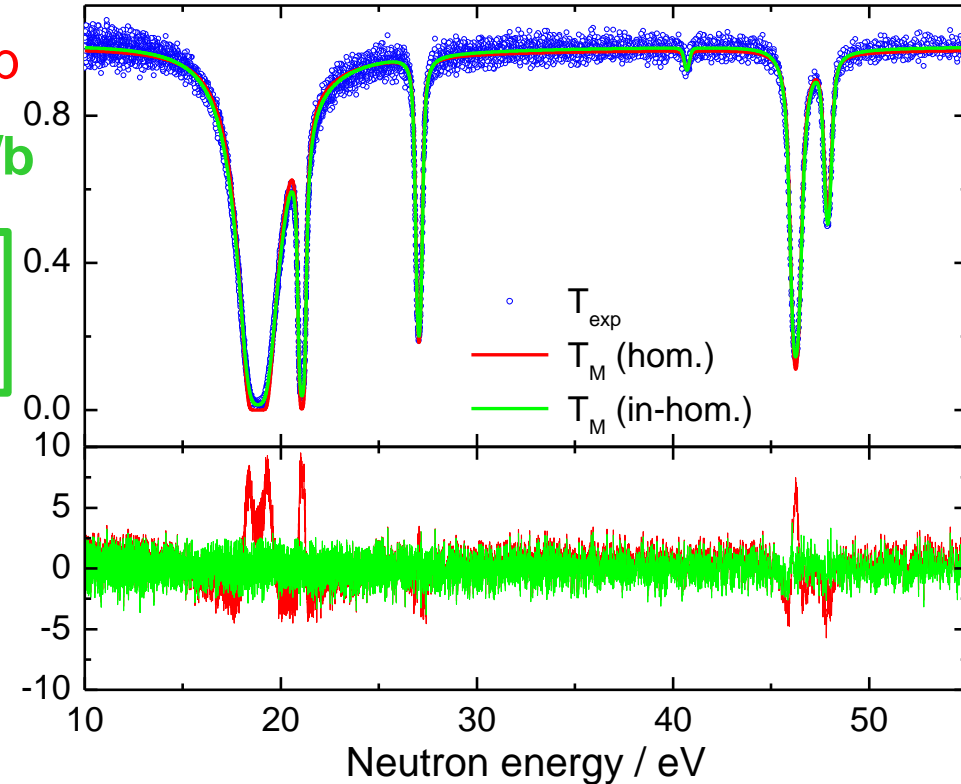

LP Model

Levermore, Pomraning et al., J. Math. Phys. 27, 2526, 1986

Implemented in REFIT

Becker et al., Eur. Phys. J. Plus 129 (2014) 58 - 9

T_M : REFIT + JEFF 3.2

Summary & conclusions

- **Methods to produce and report (Z_{exp} , $V_{Z_{\text{exp}}}$) well established**
- **(RP , V_{RP}) in URR: well understood**
- **(RP , V_{RP}) in RRR:**
 - **Covariances (including correlations) depend on the experimental conditions!**
 - **Main problem: propagate the covariance of experimental parameters**
 - **GLSQ + CUP : relies on a perfect model (reaction and experiment)**
 - Requires verification of the quality of the model
 - **GLSQ + MC: conservative**
 - Recommended when quality of the experimental model cannot be verified
- **Transmission measurements on homogeneous well-characterized samples can be considered as one of the most accurate integral experiments to validate cross data in the RRR.**
- **Data obtained with powder samples might be strongly biased!**