




Wir schaffen Wissen – heute für morgen

**Paul Scherrer Institut
PROTEUS**

PROTEUS FDWR-II (HCLWR) program summary for SG-39


Phase II

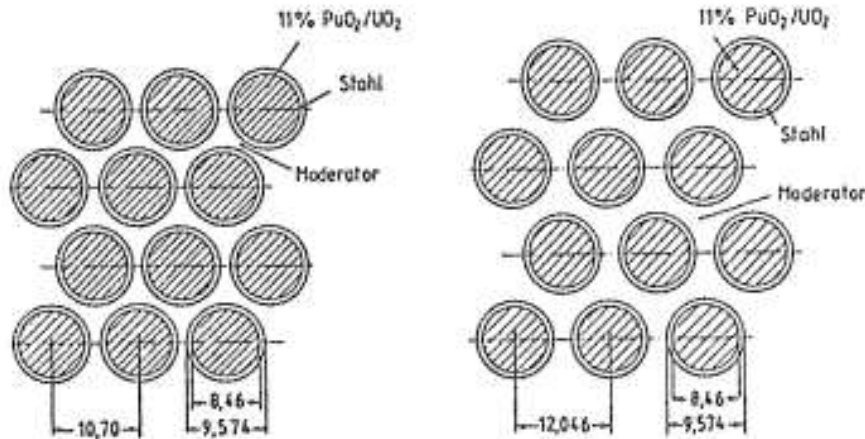

Kern	p/d	V_M/V_F	Moderator	Eff. Moderation
7	1.12	0.48	H ₂ O	0.48
8	1.12	0.48	ohne	0.00
9	1.12	0.48	Dowtherm	0.28
10	1.12	0.48	Dowtherm	0.28
11	1.12	0.48	ohne	0.00
12	1.12	0.48	H ₂ O	0.48
13	1.26	0.95	H ₂ O	0.95
14	1.26	0.95	ohne	0.00
15	1.26	0.95	Dowtherm	0.55
16	1.26	0.95	H ₂ O	0.95
17	1.26	0.95	ohne	0.00
18	a)	2.07	H ₂ O	2.07
19	1.26	0.95	H ₂ O	0.95
20	1.26	0.95	D ₂ O	-


FDWR Phase II

- From 1985 to 1990 in PROTEUS reactor
- PROTEUS is a driven system whose test zone contains the FDWR lattices
- UO₂/PuO₂ pellets with 11% PuO₂
- Pu(8/9/0/1/2): 1%, 64%, 23%, 8%, 4%
- Fuel diameter: 8.46mm
- Fuel total height: 84 cm
- 2 axial blankets:
 - Udep. 0.224w% ²³⁵U
 - 28-cm high each
- Several moderation conditions
 - Two triangular pitches
 - Different moderators (water, downterm, air)

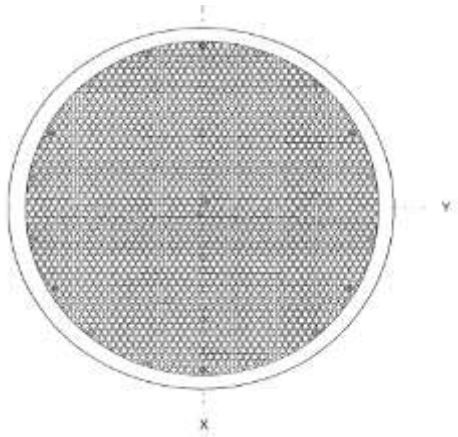


Core 7,8,9

- Homogeneous ($V_m/V_f = 0.48$)
- Water, air and downterm moderators
- B_4C central pin and moderator hole
- Axial MOX blanket interface in central pin

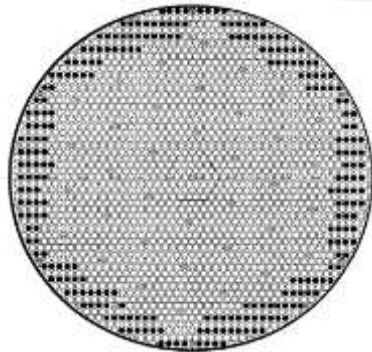


Core 10

- Heterogeneous with water holes at the periphery and 37 B_4C absorber rods
- Downterm (41.4% void)

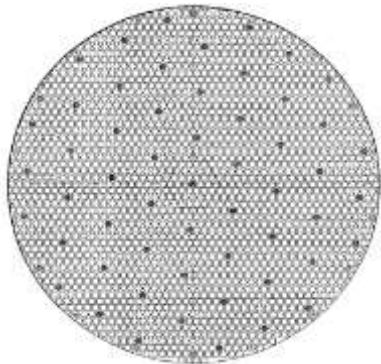


Core 11, 12

- Heterogeneous with 55 B_4C absorber pins
- Air und Wasser

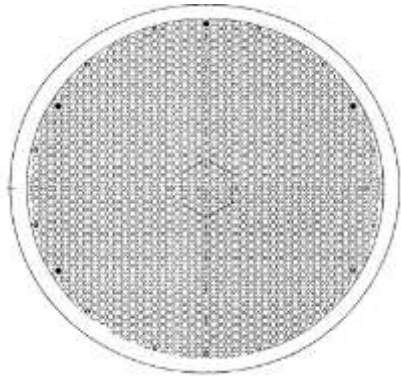


Core 13,14,15

- Homogeneous ($V_m/V_f = 0.95$)
- Water, air and downterm moderators
- B₄C central pin and moderator hole
- Axial MOX blanket interface in central pin

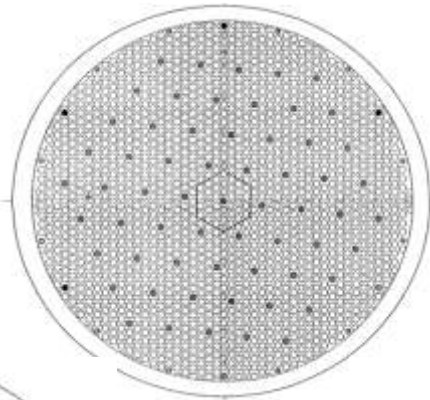


Core 16, 17

- Heterogeneous with 61 B₄C absorber pins ($V_m/V_f = 0.95$)

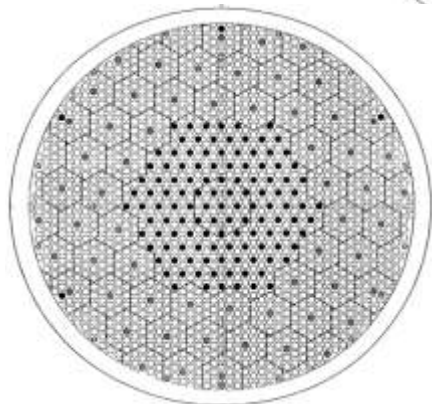


Core 18

- Heterogeneous with 60 B₄C absorber pins and 121 water holes ($V_m/V_f = 2.07$)

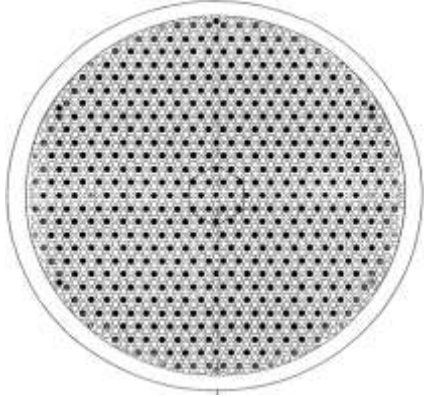


Core 19

- Heterogeneous with a 2:1 ratio of PuO_2/UO_2 and UO_2 0.22w% pins ($V_m/V_f = 0.95$)
- Water, air and downterm moderators
- B_4C central pin and moderator hole
- Axial MOX blanket interface in central pin

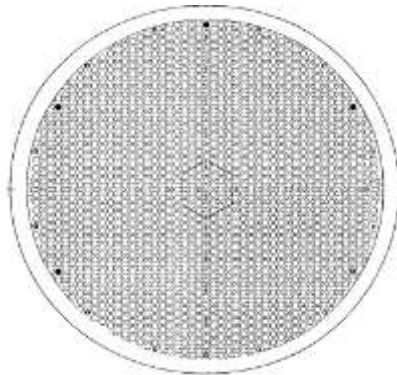

Core 20


- Homogeneous
- D_2O moderator
- B_4C central pin and moderator hole
- Axial MOX blanket interface in central pin

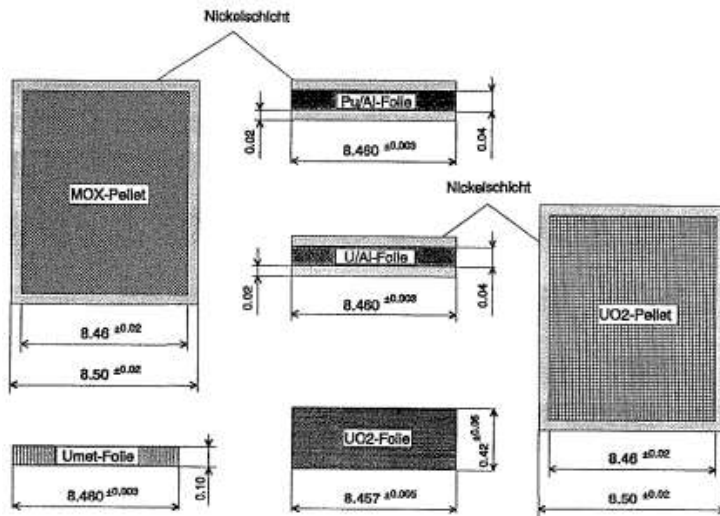


Spectral index measurements (core 13 - ref)




- F5/F9 ~ 0.72 F1/F9 ~ 1.50
- F8/F9 ~ 0.89 C2/F9 ~ 0.94
- C8/F9 ~ 5.1e-2
- Typical uncertainties
F5: 1.4%, F8: 2.0%, F9: 1.4%, C8: 1.8%

Reaction rate radial and axial traverses

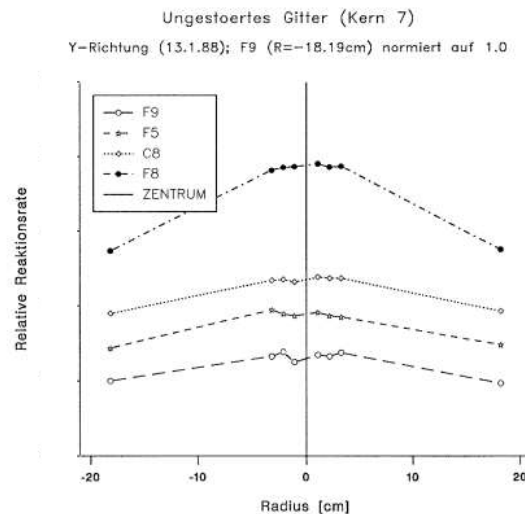

Axiale Traverse durch MOX-Blanket Interface
Folien (23.2.1988), normiert auf 1.0 bei 404 mm

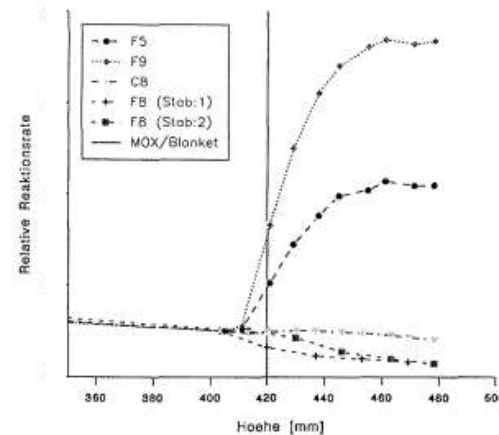

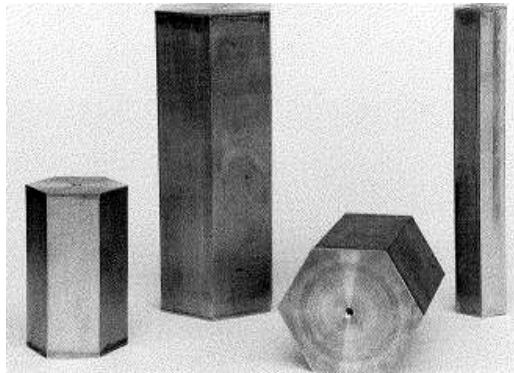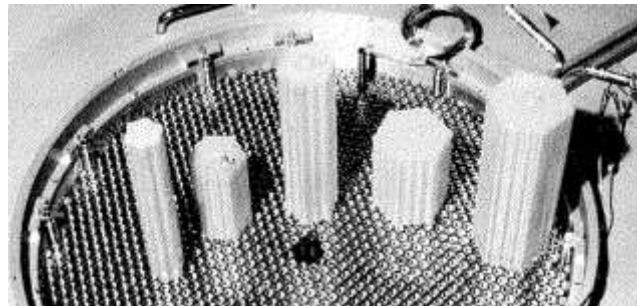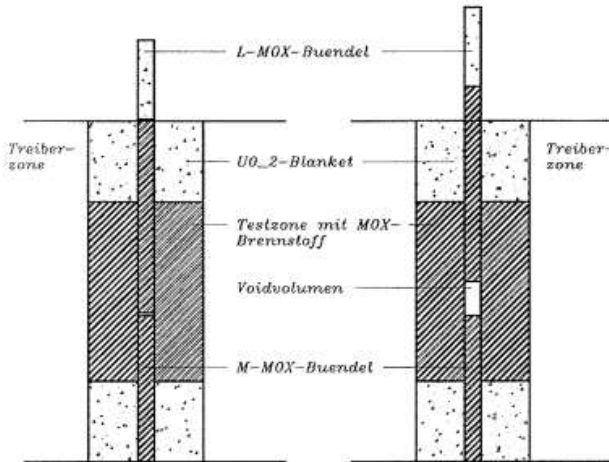

• K_{∞} measurements

$$k_{\infty} = 1 + B^2 \cdot M^2$$

$$\frac{\rho_z}{\rho_s} \frac{S}{R_f} = \bar{\nu} \frac{\overline{\Phi^{+x}}}{\overline{\Phi^{+s}}} \left(1 - \frac{1}{k^{+}} \right)$$

- Using axial and radial bucklings
- Using compensation methods with auto-rod and a ^{252}Cf sources

• Reactivity effects of

- Void volume
- Moderator volume
- Absorber rods

Absorber	Form	Durchmesser	Cladding	Bemerkung
$\text{B}_4\text{C}(\text{nat})$	Pellet	7.473	ja	Referenzabsorber
$\text{B}_4\text{C}(\text{nat})$	Pulver	7.430	ja	
$\text{B}_4\text{C}(93\%) \text{ }^{10}\text{B}$	Pellet	7.430	ja	
$\text{Ag}15\text{In}5\text{Cd}$	Legierung	8.830	nein	
Hafnium	Metall	8.350	ja	
Gd_2O_3	Pellet	8.310	ja	
Sm_2O_3	Pellet	7.000	ja	
Tantal	Metall	8.290	ja	
Eu_2O_3	Pellet	8.243	ja	
Zircaloy-2	Legierung	8.300	nein	
Stahl	Metall	8.240	nein	Strukturmaterial

PSI

- Cell calculations: WIMSD4 with the WIMS-1981 data library
- Whole reactor calculations: ONEDANT (one dimension transport)
- Macroscopic cross-sections generation:
 - WIMSD4 (P0 transport corrected) → DSNXSL → XSLIB

KfK

- Cell calculations: KAPER4 with the G69P1V02 data library (69 Groups)
- Whole reactor calculations: 2D DIXY2 diffusion and TWODANT transport codes
- Macroscopic cross-sections with transport corrected P0 and P1, S4

TUBS

- XS preparation: modified WIPRO, NJOY (ENDF/B-V, JEF-1), various DATUBS-nn
- Cell calculations: SPEKTRA (various libraries)
- Whole reactor calculations: DITUBS (2D diffusion, 35 groups)